

Cost-efficient and compact professional machine.
Cold Milling Machine W 200 F





Cost-efficient and compact professional machine.



The easy-to-operate, compact cold milling machine caters to a wide range of applications from surface course rehabilitation via pavement removal at full depth all the way to fine milling operations.

The innovative MILL ASSIST machine control system permits efficient operation of the machine in automatic mode paired with high performance and user friendliness.

The machine completes milling jobs with the utmost precision thanks to the advanced **LEVEL PRO ACTIVE** levelling system.

Milling drum units can be exchanged quickly and easily to realize milling widths of 2.0 m or 2.2 m as part of the **MCS - Multiple Cutting System**.

The innovative **MCS BASIC** permits milling drums to be exchanged in an exceptionally short period of time to increase both flexibility in operation and machine utilization.

At a glance: outstanding features of the cold milling machine

04
05

Operation

1 | FULLY EQUIPPED OPERATOR'S PLATFORM

- > Perfect view of important areas of the operation
- > Exceptionally powerful LED lighting system
- > Ample storage space
- > Flexible, vertically adjustable canopy

2 | INTUITIVE MMI - MAN-MACHINE INTERFACE

- > Flexible control panel concept for maximum machine control
- > 5" control panels for levelling
- > 7" control panel for the convenient display of important parameters
- > Robust, high-quality camera system including 10" control panel

Quality

3 | VERSATILE, HIGH-PRECISION LEVEL PRO *ACTIVE* LEVELLING SYSTEM

- > New, simple **LEVEL PRO *ACTIVE*** operating concept
- > New complementary and automated features
- > Optimized 3D and laser levelling
- > Levelling boom, right, or levelling boom, right and left, including Sonic Ski sensor
- > Optimized Multiplex system

4 | HIGH RELIABILITY

- > Pioneering diagnostic concept
- > Redundant machine control system
- > Dual CAN network
- > Reliable protection against vandalism
- > Efficient servicing and maintenance concept



Milling

5 | UNMATCHED CUTTING TECHNOLOGY

- > Easy exchange of milling drums in record time
- > Quick exchange of milling drum units
- > Optimized wear protection for the milling drum unit
- > Extremely hard-wearing quick-change toolholder system HT22
- > New upper toolholder part HT22 **PLUS** with extended lifespan

6 | INNOVATIVE MILL ASSIST

- > **MILL ASSIST** automatic mode
- > Additional pre-selection of operating strategy in automatic mode
- > Clear pre-selection of consistent milling pattern quality
- > Innovative efficiency display



Performance

7 | MAXIMUM MILLING PERFORMANCE

- > High-powered diesel engine
- > Increased ballasting flexibility
- > Large scraper lift
- > Flexible and efficient material loading
- > "Boost" feature to increase the discharge trajectory

Economy

8 | REDUCED DIESEL CONSUMPTION

- > Extended range of usable milling drum speeds
- > Maximum use of engine power in the low engine speed range
- > Start-stop engine feature via exterior control panel
- > Intelligent dual fan concept

9 | ENVIRONMENTALLY SUSTAINABLE MACHINE TECHNOLOGY

- > Low exhaust emissions
- > Reduced noise emissions during repositioning
- > Optimized VCS extraction system
- > Efficient water management

Operation

Fully equipped operator's platform

06
07

PERFECT VIEW OF IMPORTANT AREAS OF THE OPERATION

The intelligent visibility concept of the large milling machine significantly increases operator comfort and leads to precise milling results. The operator's platform has been designed to extend to the outer edge of the machine on the left, while the railing on the right can be simply adjusted outwards in order to ensure optimum visibility of the surface to be milled and of the material loading process. In addition, the slender design of the machine offers a wasp waist at the front left and right, and at the rear right. This gives the operator an unobstructed view of the crawler unit and milling edge.

EXCEPTIONALLY POWERFUL LED LIGHTING SYSTEM

The W 200 F is equipped with exceptionally powerful LED working lights installed in different positions on the machine, operator's platform lighting, and a "Welcome"

and "Go home" lights feature for convenient access. Additional on-board features include control panel illumination, lighting of the milling drum unit including auxiliary lights for pick replacement, as well as optional lighting balloons. These ensure optimum lighting even in poor lighting conditions.

AMPLE STORAGE SPACE

The W 200 F offers ample storage space for levelling sensors, pick extractors and pick containers. An optional additional 1,380-litre XXL-size storage compartment at the rear of the machine can accommodate up to 69 pick containers; another 85-litre storage compartment on the operator's platform can be installed as an optional feature.



FLEXIBLE, VERTICALLY ADJUSTABLE CANOPY

The hydraulically height-adjustable canopy can be individually adjusted in height to cater to different operating and weather conditions. The height can be adjusted at the mere push of a button even during the milling operation in order to avoid, for example, low-hanging branches in a tree-lined avenue. The outer roof shells can be moved independently to offer additional protection against rain.



1 | Ergonomically designed operator's platform.

2 | The canopy offers flexible vertical height adjustment.

3 | Canopy in transport position.

4 | The extra-large, optional storage compartment at the rear of the machine offers ample space for pick containers and tools.

Operation

Intuitive MMI - man-machine interface

08
09

FLEXIBLE CONTROL PANEL CONCEPT FOR MAXIMUM MACHINE CONTROL

The new control panel concept allows different control panels to be compiled in accordance with customer specifications. An important requirement for the WIRTGEN design engineers was to provide the machine operator with a comprehensive and clear-cut status, diagnostic and information display. The new intuitive, easy-to-understand control panel concept fully meets these requirements.


5" CONTROL PANELS FOR LEVELLING

When levelling with the **LEVEL PRO ACTIVE** levelling system, up to two additional 5" control panels can optionally be attached on the left and right side of the machine for use by the ground crew.

7" CONTROL PANEL FOR THE CONVENIENT DISPLAY OF IMPORTANT PARAMETERS

Whether working on the operator's platform or the lower operating positions: the new control panel concept provides comprehensive and clear-cut information. The 7" control panel provides the following readouts, for example, to each machine operator: machine load, temperatures, hydraulic pressures, diesel and water filling levels, levelling control, status and diagnostic reports, as well as general information such as the current time.


11

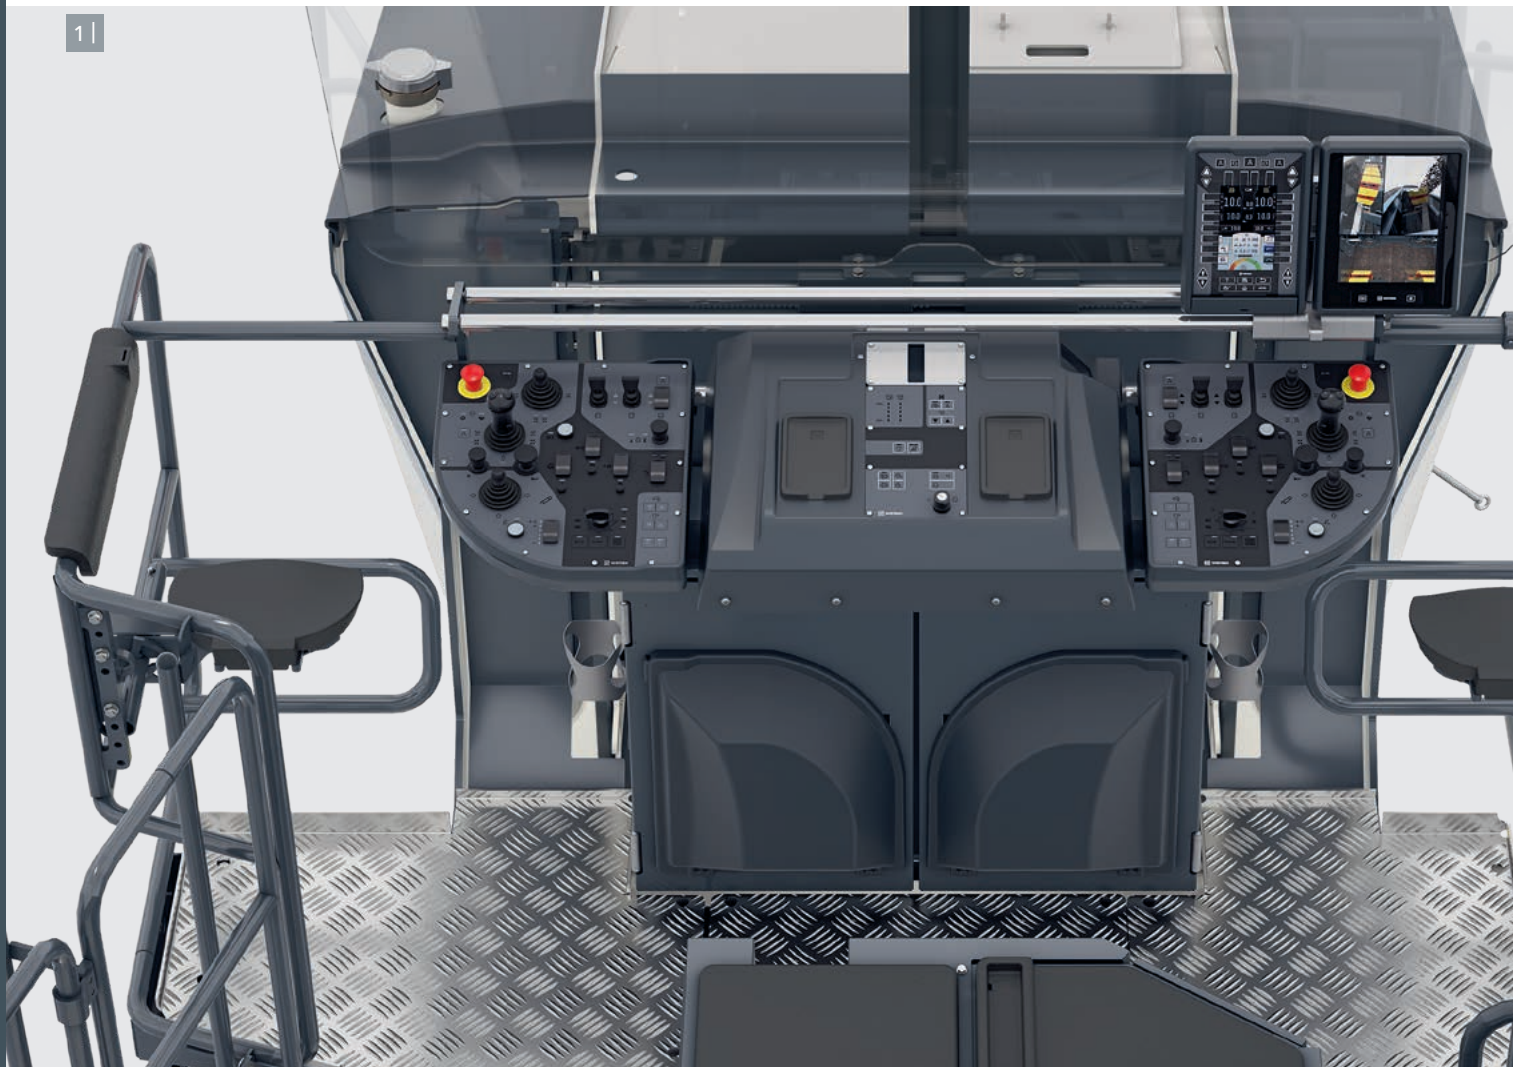

1 | Customized, user-friendly panel arrangement.

2 | Overview of the different control panels and their positions.

2 |

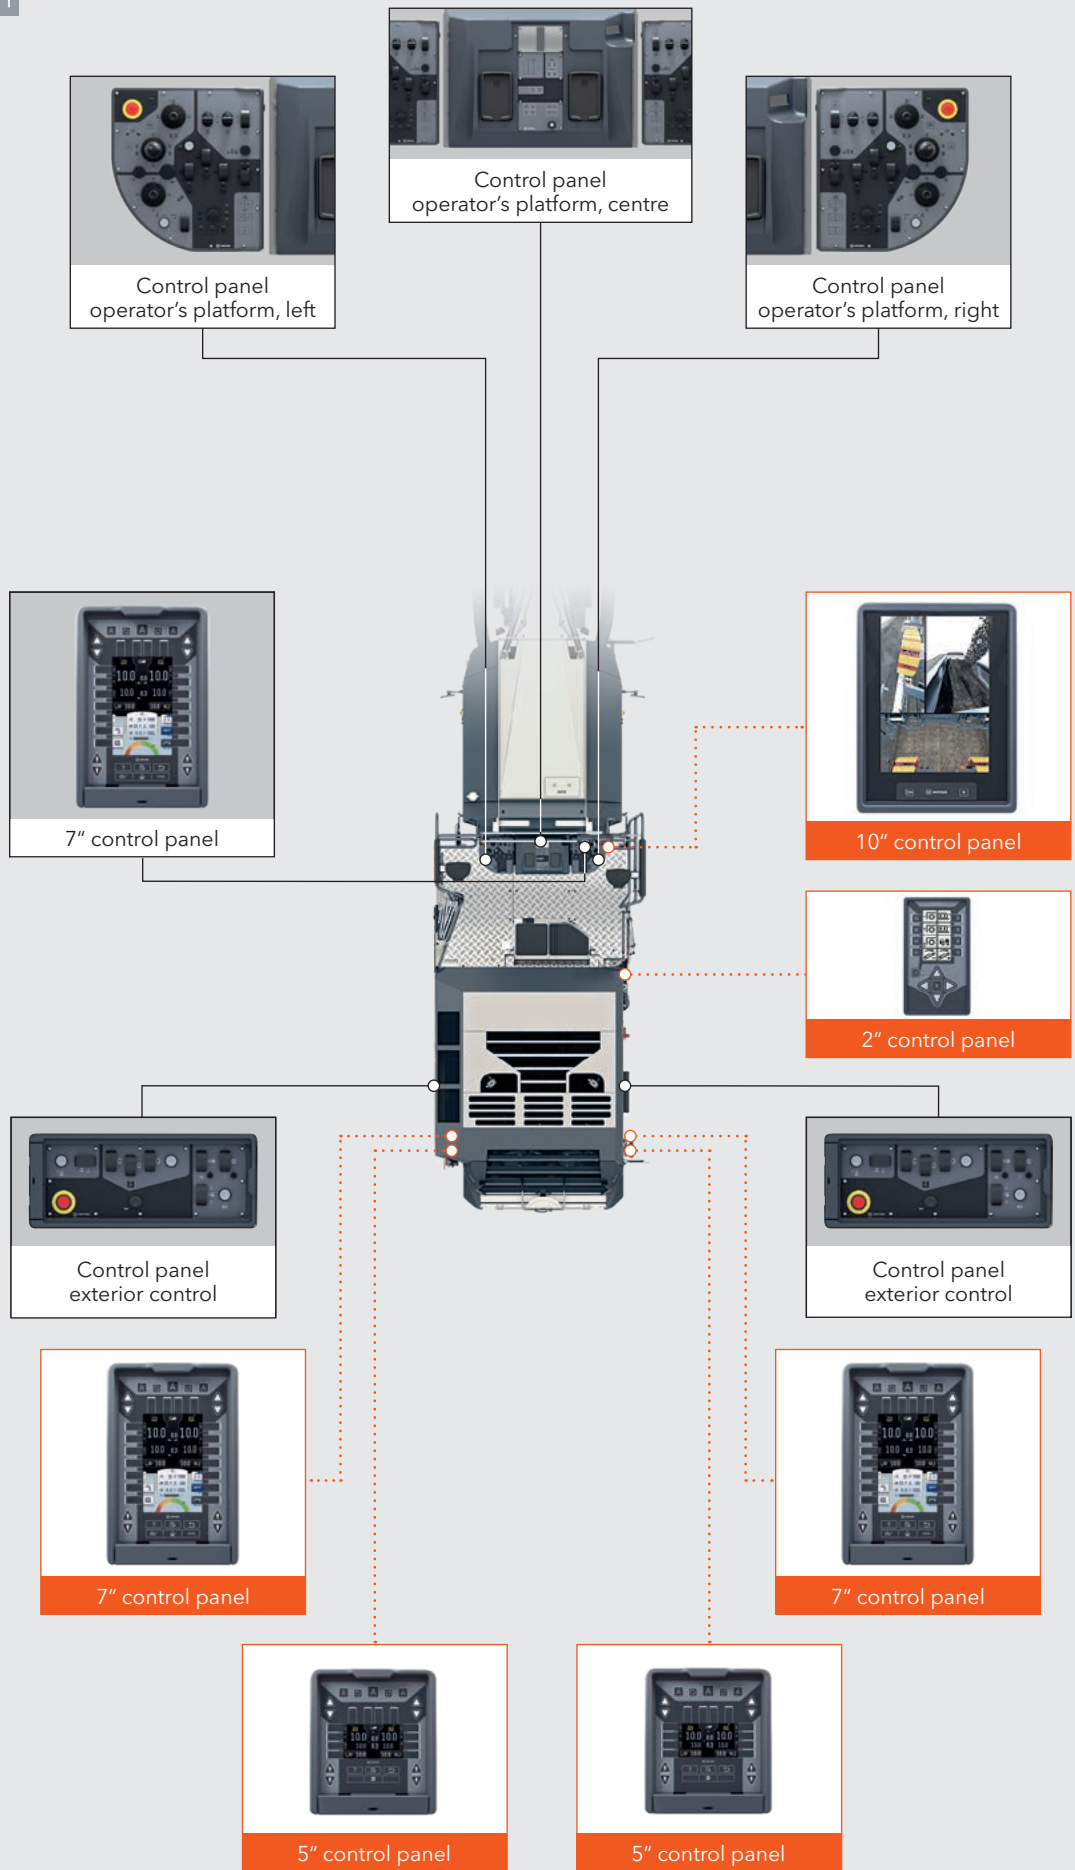

□ = Standard control panels
□ = Optional control panels

Operation

Intuitive MMI - man-machine interface

ROBUST, HIGH-QUALITY CAMERA SYSTEM INCLUDING 10" CONTROL PANEL

A camera system comprising two, four or eight cameras is available as an optional equipment feature. When using the twofold camera system, the camera images are displayed on the 7" control panel installed on the operator's platform. The fourfold and eightfold camera systems come with an additional 10" control panel

which can display multiple camera images simultaneously using a split screen feature. The robust camera systems provide the machine operator with a direct view of important areas of the operation, such as the material loading process or the milled surface behind the scraper.

1 |



1 | 10" control panel with split screen feature for the simultaneous display of multiple camera images.

2 | Optional 5" control panel providing levelling details to the ground crew.


3 | Different camera systems for a good view of important areas of the operation.



3 |


Twofold camera system:

Camera at the rear / camera displaying the loading situation

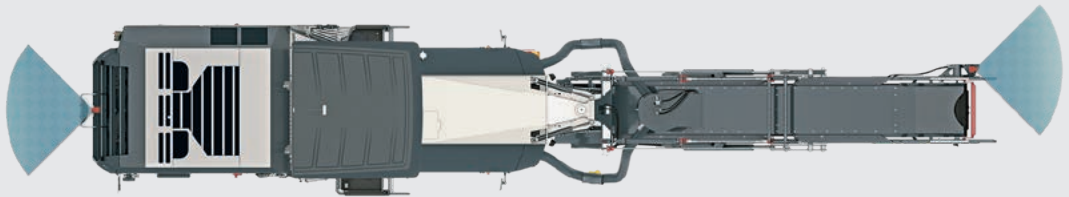


Fourfold camera system:

Twofold camera system, additional cameras on the left and right side of the machine towards the front

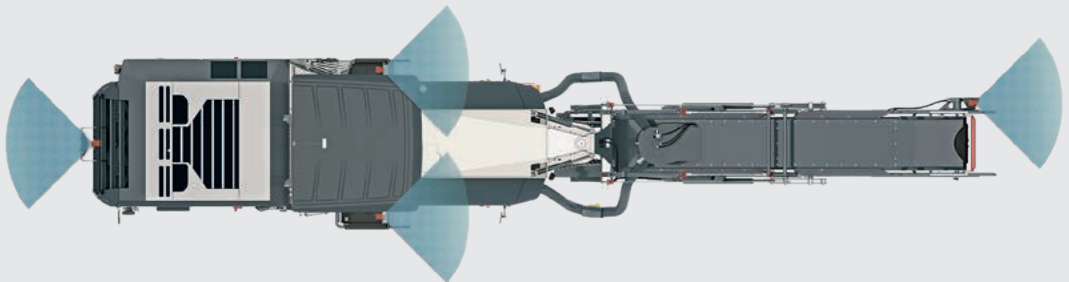

Eightfold camera system:

Fourfold camera system, additional cameras on the left and right side of the machine towards the rear / camera at the scraper / camera in front of the milling drum

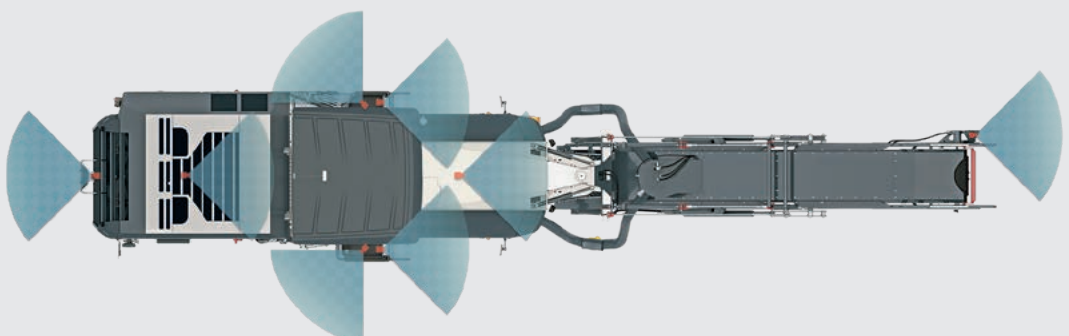

Quality Versatile, high-precision levelling using LEVEL PRO ACTIVE

NEW, SIMPLE LEVEL PRO ACTIVE OPERATING CONCEPT

The new **LEVEL PRO ACTIVE** levelling system developed specifically for cold milling machines uses innovative control panels and offers easy, intuitive operation. Fully integrated into the machine's control system, it permits a high level of automation as important features of the machine are directly interlinked, guaranteeing highly precise milling results. With the 3D kit, **LEVEL PRO ACTIVE** additionally offers a simple 3D system interface designed in line with field requirements.

NEW COMPLEMENTARY AND AUTOMATED FEATURES

The **LEVEL PRO ACTIVE** levelling system offers numerous complementary and automated features relieving

the machine operator of a part of his workload. All sensors connected to the system are displayed and can be selected on the control panel. This also speeds up the progress of operations. The entire machine can thus be raised quickly and easily, for example, to drive over a manhole cover.


OPTIMIZED 3D AND LASER LEVELLING

Laser sensors can be mounted on the canopy of the cold milling machine quickly and easily to facilitate the use of 3D systems.

LEVELLING BOOM, RIGHT, OR LEVELLING BOOM, RIGHT AND LEFT, INCLUDING SONIC SKI SENSOR

The new levelling booms with Sonic Ski sensors allow non-contact scanning of a wire or reference surface on both sides of the machine at a distance of up to

11

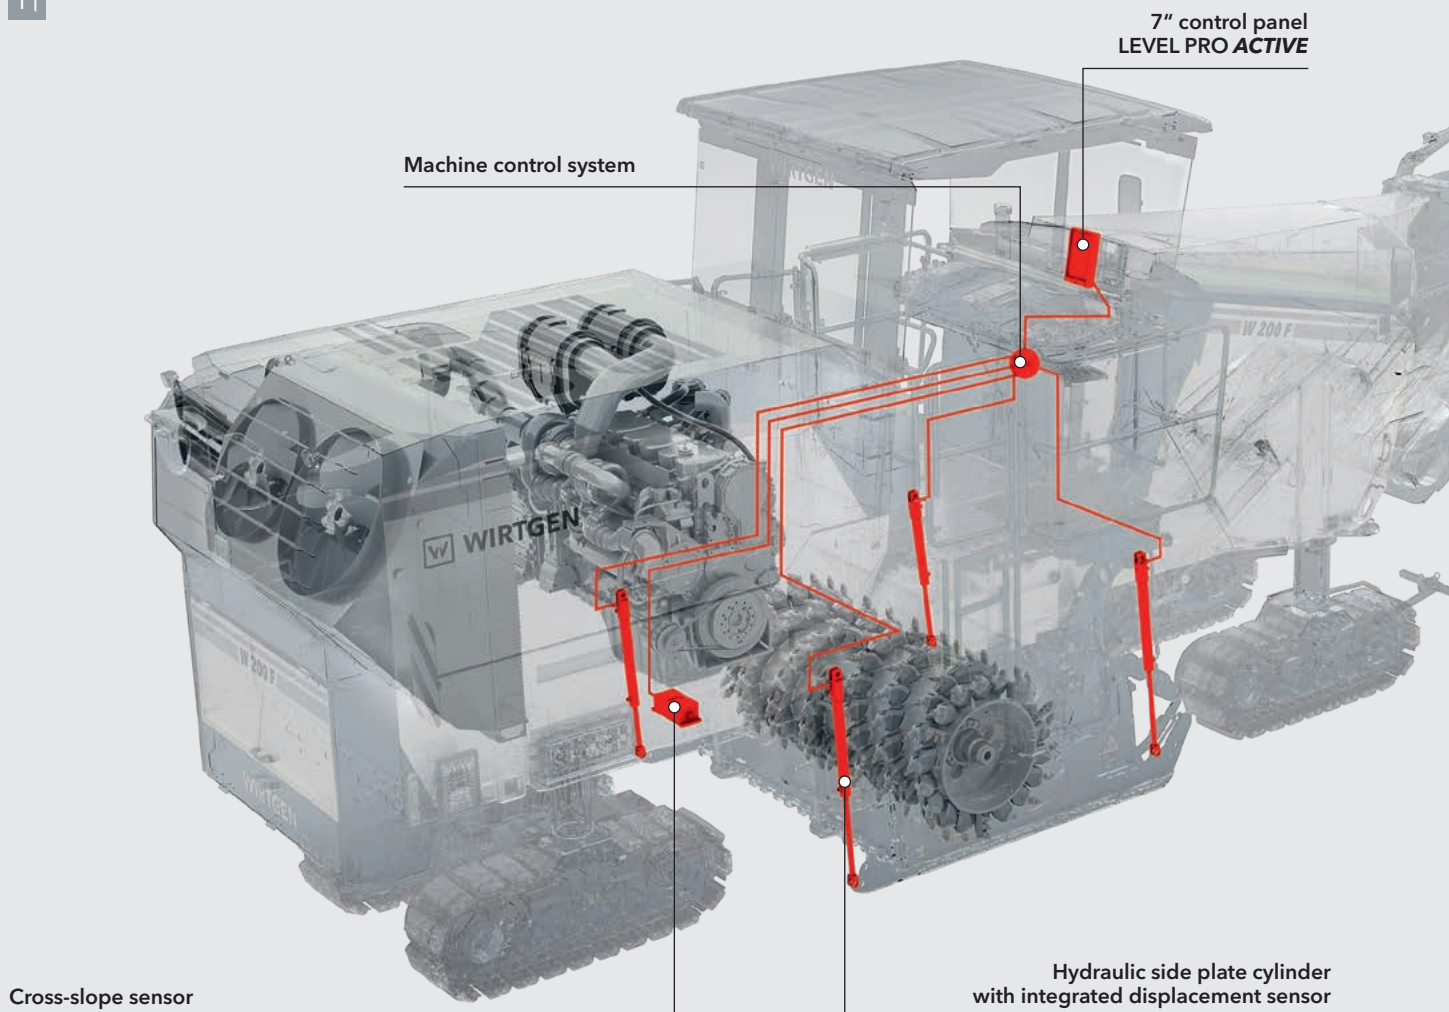

Machine control system

7" control panel
LEVEL PRO ACTIVE






Cross-slope sensor

Hydraulic side plate cylinder
with integrated displacement sensor

1,900 mm from the milling edge. The levelling boom including Sonic Ski sensor can be telescoped hydraulically by up to 840 mm from the operator's platform even during the milling operation; mechanical adjustment allows an additional 880 mm of telescopic travel.

OPTIMIZED MULTIPLEX SYSTEM

The Multiplex system comprises two ultrasonic sensors per machine side which are attached to adjustable swivel arms. Advantages of the system include the large adjustment range for a variety of levelling applications, as well as the low weight of the individual units. The swivel arms are simply folded in for machine transport.

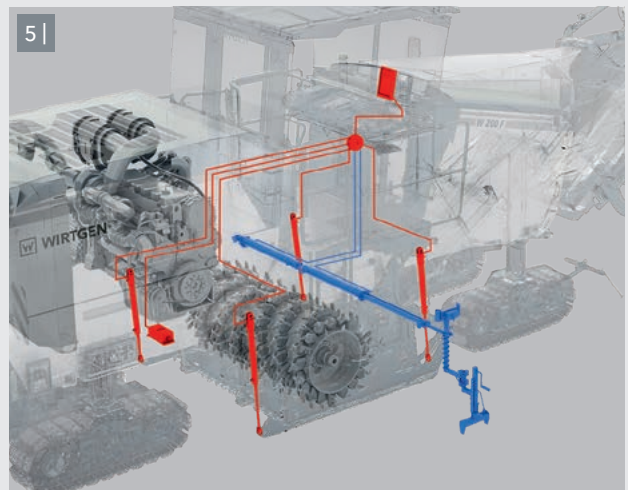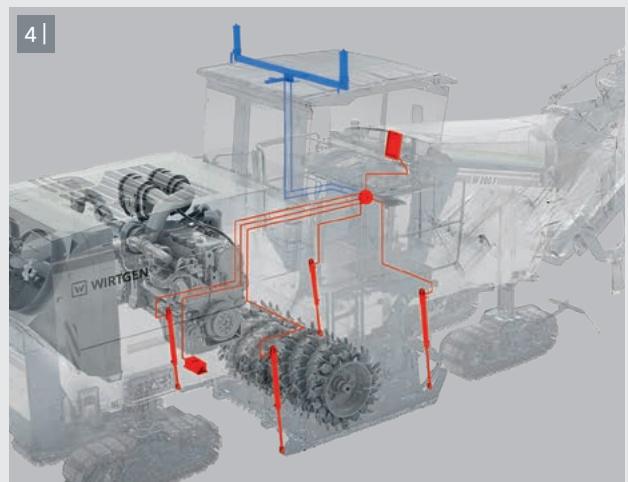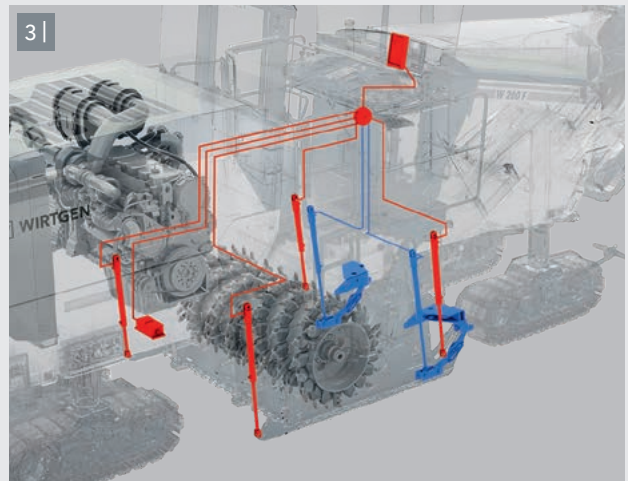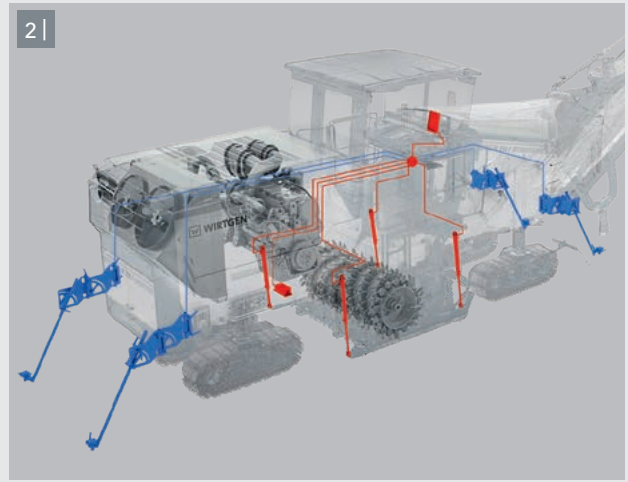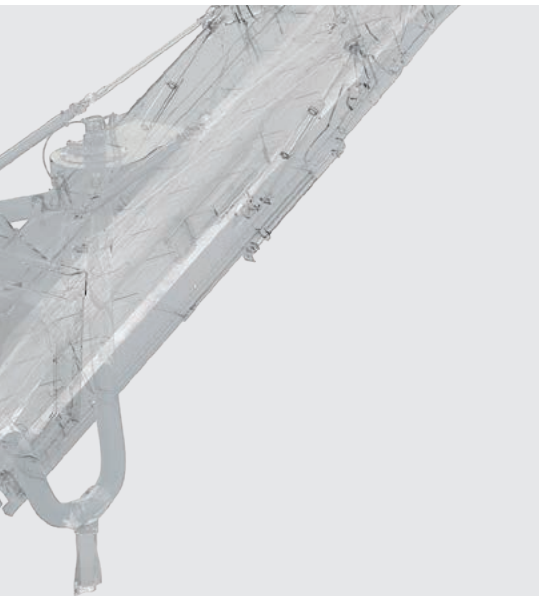

- 1 | W 200 F fitted with standard levelling sensors.
- 2 | Multiplex system comprising up to four ultrasonic sensors.
- 3 | Scanning in front of the milling drum.
- 4 | 3D levelling / laser levelling.
- 5 | Telescoping levelling boom, right or left.

■ = Standard equipment
 ■ = Optional equipment

Quality High reliability

14
15

PIONEERING DIAGNOSTIC CONCEPT

The new diagnostic concept guides the machine operator through the troubleshooting process in a few simple and intuitive steps. Any malfunction is indicated to the operator on the screen together with a clear description of the fault, enabling him to locate the fault by means of optimized, easy-to-understand colour graphs. Finally, comprehensive textual support enables the operator to begin remedying the fault.

REDUNDANT MACHINE CONTROL SYSTEM

Three control computers integrated in the control system can be interchanged to ensure the machine's operational readiness if one of the three computers should fail. In addition, the two 7" control panels installed on

the operator's platform and on the side of the machine for operation by the ground crew can be readily interchanged while fully maintaining all machine functions.

DUAL CAN NETWORK

The CAN bus is duplicated in important sections and can be readily reconnected as and when required. The main controls feature dual-channel signal transmission to ensure that functions are executed even if one signal should fail. The failure of a signal is additionally displayed on the control panel.

11



1 | Direct forwarding of the image from the error message to the diagnostic system including clear location of the fault.

2 | Optimum access to the servicing points.

3 | Quick and reliable protection of the control panels.



RELIABLE PROTECTION AGAINST VANDALISM

The innovative vandalism protection feature protects the control panels against the use of force or theft. The linear control panels arranged on the operator's platform, for example, are folded over the central control panel and secured. Securing the control panels in a few simple steps additionally speeds up the preparations for machine transport.

EFFICIENT SERVICING AND MAINTENANCE CONCEPT

The W 200 F offers exceptionally easy access to all servicing and maintenance points. The air, hydraulic oil, engine oil and diesel filters can be reached quite easily from the walkway when the engine cowling is open. In addition, all relevant machine components provide quick and ready access.

Unmatched cutting technology

EASY EXCHANGE OF MILLING DRUMS IN RECORD TIME


Milling drums are now exchanged even more quickly thanks to the new generation of MCS milling drums. A single central bolt needs to be loosened, which can be performed by the milling drum rotation device at the mere push of a button. All that remains to be done for the operator is to pull out the milling drum. The side door on the right is opened quickly and effortlessly as it features a hydraulic cylinder drive.

1 | *Extra-quick exchange of milling drums using the new MCS BASIC milling drum system.*

2 | *Large choice of different MCS milling drums.*


The simplified process offers numerous advantages: the rapid exchange of application-specific milling drums with different tool spacings increases machine productivity. The short-term exchange and use of the milling drum best suited to the job to be performed reduces wear costs. In addition, maximum flexibility is guaranteed in order to cater to the ever-changing requirements in day-to-day business.

11

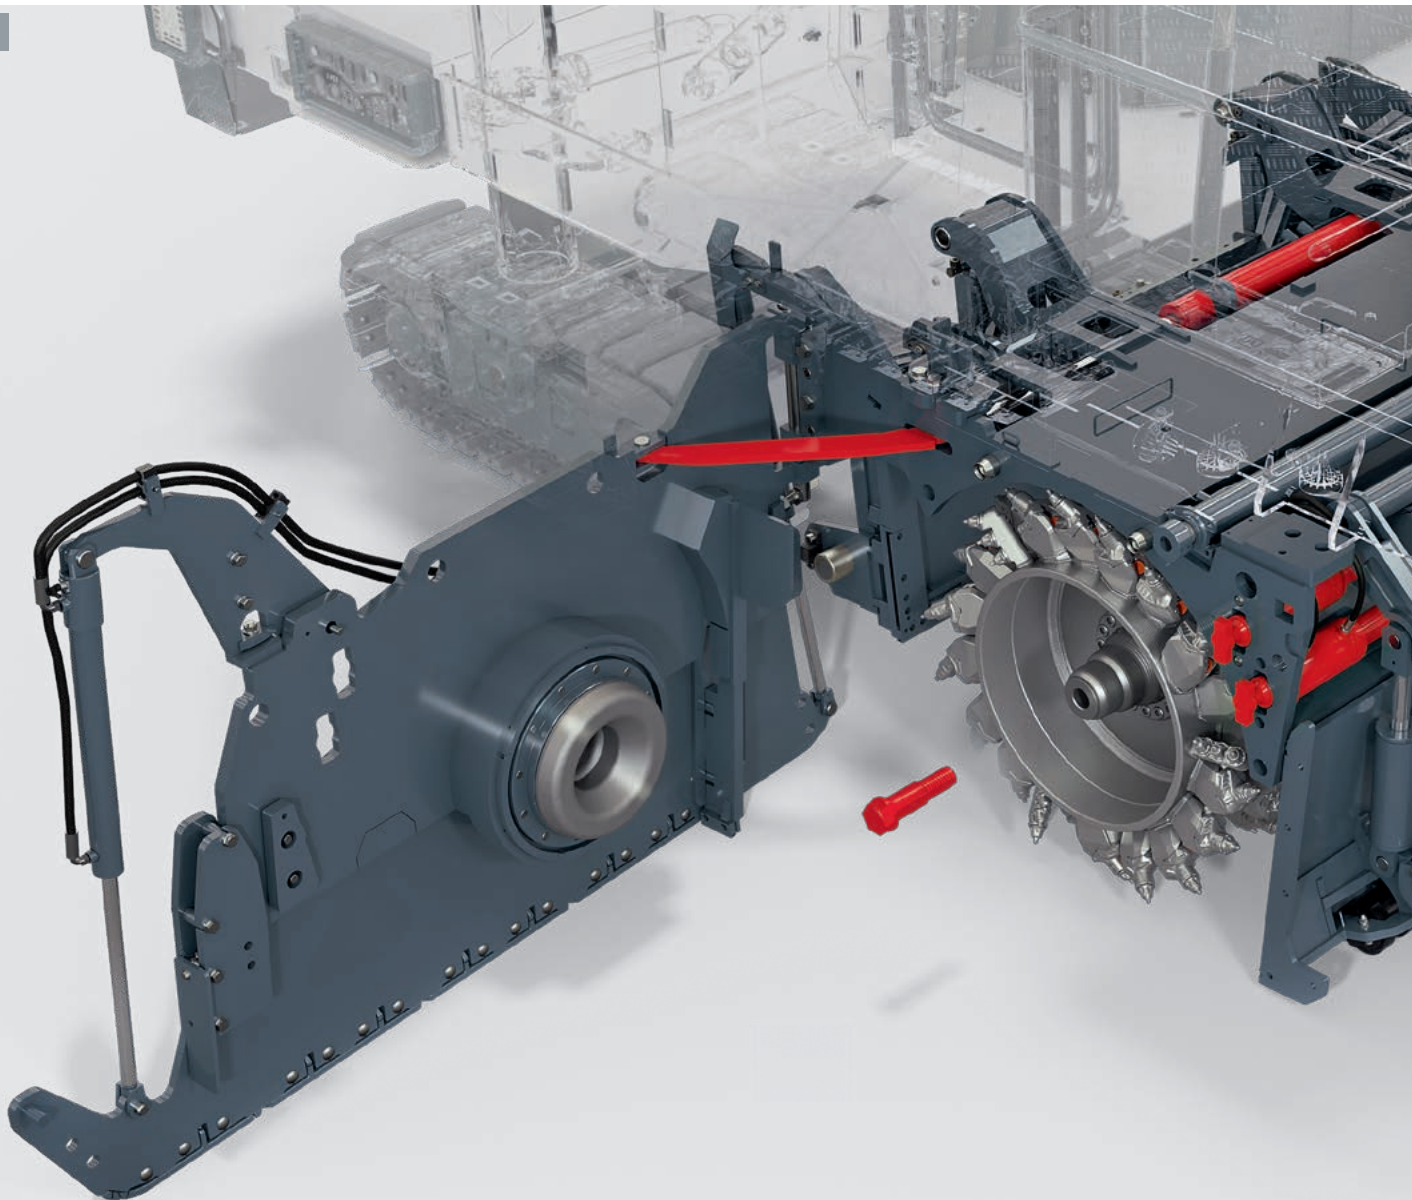


EASY EXCHANGE OF MILLING DRUM UNITS


Different milling widths of 2.0 m or 2.2 m can be realized using the new quick-change milling drum unit. The simplified quick-change system allows milling drum units of different working widths to be exchanged in no more than an hour's time. The operator's job is made even easier by a significant increase in the stroke of the machine's height adjustment feature. The process is completed by simply connecting one electrical plug-in connector, two hydraulic quick-release couplings and one water line.

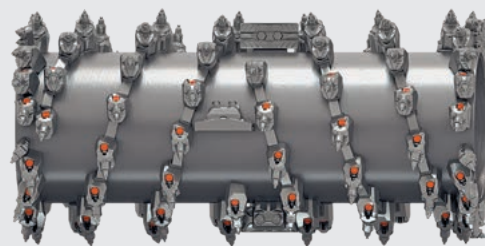

ECO cutter
 Milling width: 2,000 mm
 Milling depth: 0 to 330 mm
 Pick spacing: 25 mm

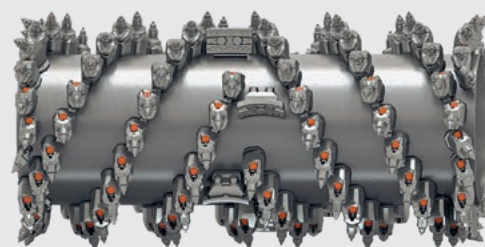


Standard milling drum
 Milling width: 2,000 mm
 Milling depth: 0 to 330 mm
 Pick spacing: 18 mm

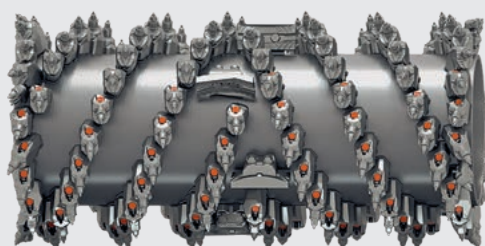

Standard milling drum
 Milling width: 2,000 mm
 Milling depth: 0 to 330 mm
 Pick spacing: 15 mm



Fine milling drum
 Milling width: 2,000 mm
 Milling depth: 0 to 100 mm
 Pick spacing: 8 mm

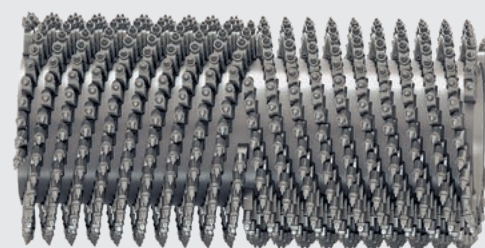

Micro-fine milling drum
 Milling width: 2,000 mm
 Milling depth: 0 to 30 mm
 Pick spacing: 6 x 2 mm

Unmatched cutting technology

OPTIMIZED WEAR PROTECTION FOR THE MILLING DRUM UNIT

Wear segments mounted on the side plates in a detachable fashion can be turned about 180° so that both sides can be used and the lifespan doubled. Optional rollers fitted to the side plates prevent scratch marks on the asphalt pavement. In addition, the material depressor also moves on the pavement on rollers to minimize wear and tear.

EXTREMELY HARD-WEARING HT22 QUICK-CHANGE TOOLHOLDER SYSTEM


Fitted with the **HT22** quick-change toolholder system,

the milling drums on offer for the W 200 F are the ideal candidates for complex, challenging milling applications. In addition, the robust milling drum design permits the upper toolholder parts to be replaced quickly and as needed right on the construction site.

NEW UPPER TOOLHOLDER PART HT22 PLUS WITH EXTENDED LIFESPAN

The new upper toolholder part **HT22 PLUS** features an innovative centring embossment in the pick contact surface. In combination with the new X² generation of picks, toolholder wear is reduced by up to 25%, and pick rotation is optimized as a result.



11

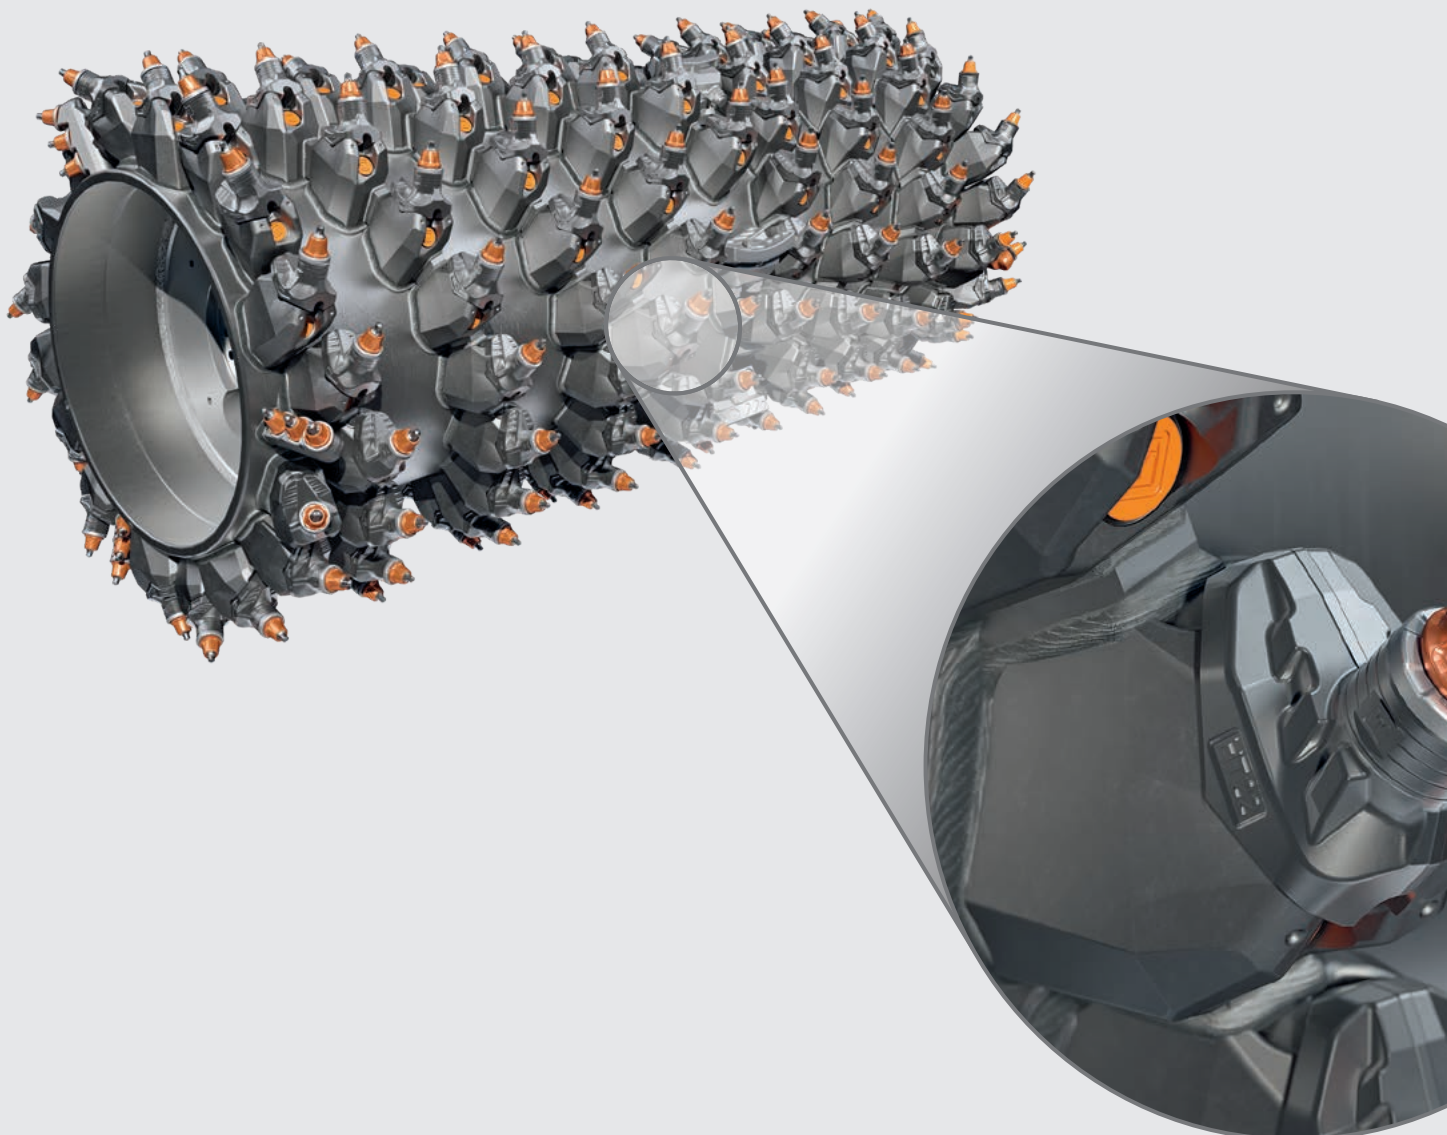

Salient features of the new upper part include improved quality of the milled surface and extended replacement intervals.


2 |

W 200 F with 2.0-m wide drum unit



Standard milling drum
 Milling width: 2,000 mm
 Milling depth: 0 to 330 mm
 Pick spacing: 15 mm

W 200 F with 2.2-m wide drum unit



Standard milling drum
 Milling width: 2,200 mm
 Milling depth: 0 to 330 mm
 Pick spacing: 15 mm

1 | *Extremely hard-wearing HT22 quick-change toolholder system.*

2 | *Milling drum units 2.0 m and 2.2 m wide.*

3 |



3 | *In combination with the new pick, the centring embossment on the new toolholder optimizes rotation to reduce wear and tear.*



Innovative MILL ASSIST

MILL ASSIST AUTOMATIC MODE

The innovative **MILL ASSIST** machine control system always adjusts the most favourable relationship between performance and cost when operating in automatic mode. The process is optimized by automatically adjusting the speed of the diesel engine and milling drum, the traction drive, the water system and the machine's advance rate. This relieves the machine operator of a tremendous part of his workload while at the same time improving machine performance and minimizing diesel consumption, CO₂ emissions, pick consumption and noise emissions.

ADDITIONAL PRE-SELECTION OF THE OPERATING STRATEGY IN AUTOMATIC MODE

The operator can additionally pre-select one of three operating strategies for each milling job: cost-optimized, performance-optimized, or quality of the milling pattern. The machine then automatically controls the main parameter settings in accordance with the strategy chosen.

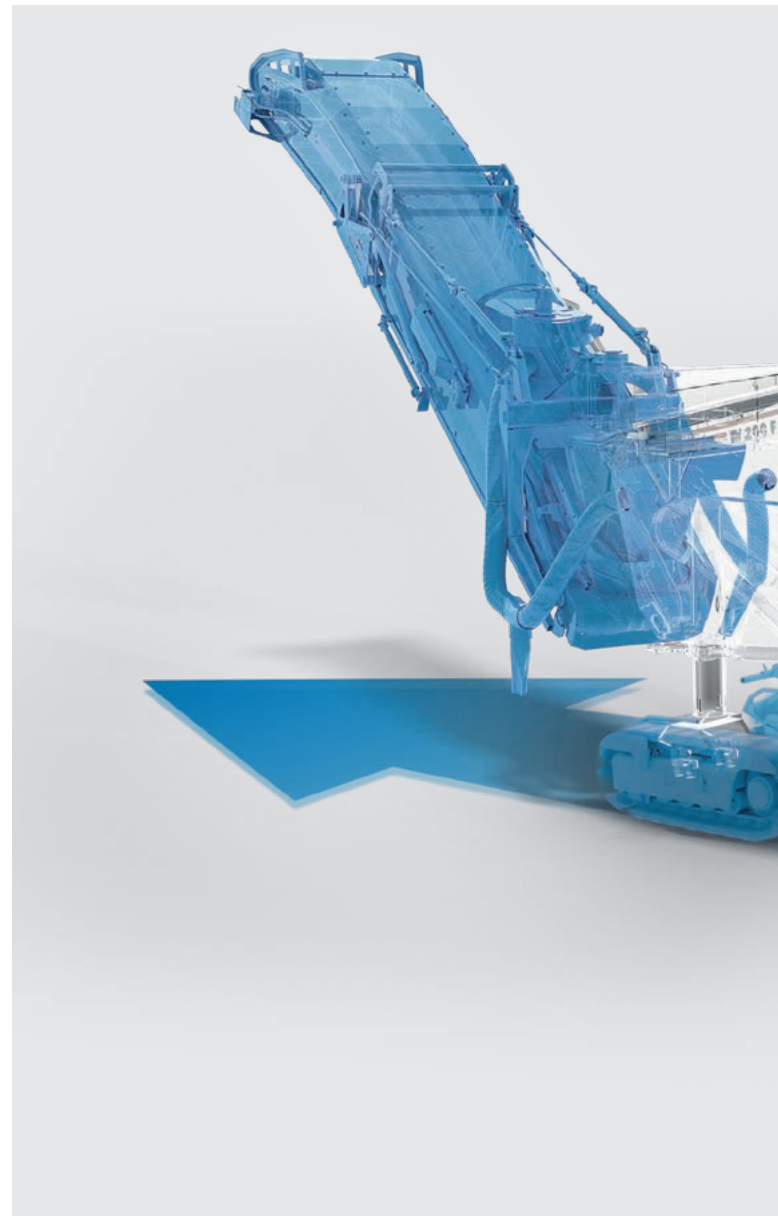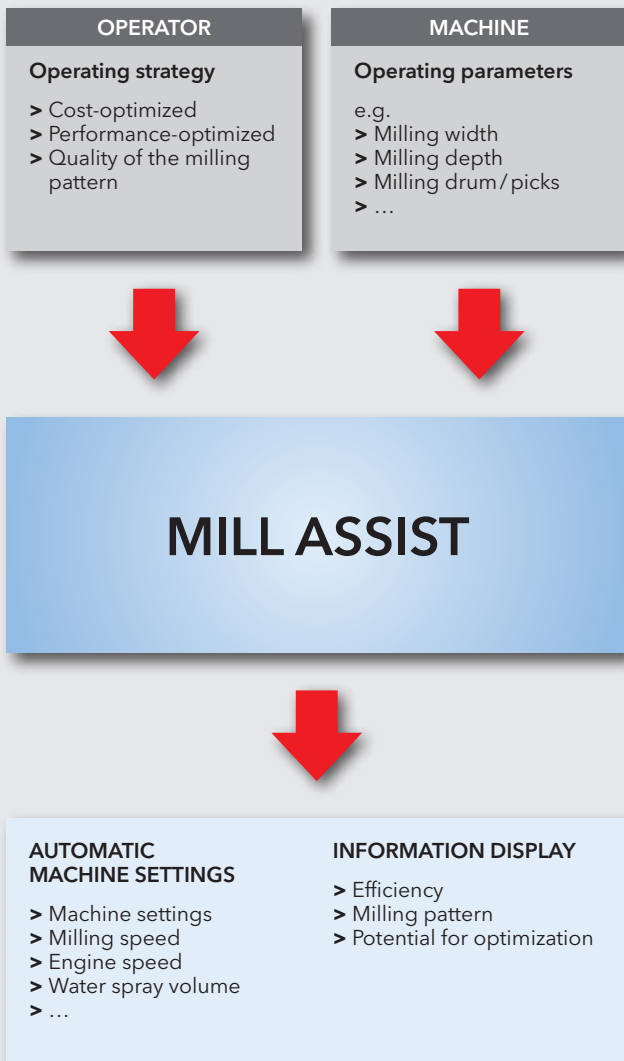


CLEAR PRE-SELECTION OF CONSISTENT MILLING PATTERN QUALITY

The specified quality of the milled surface can be preset by simple pre-selection from a scale ranging from 1 to 10. The milling drum speed and milling rate are then adjusted automatically taking into account the type of milling drum used.

INNOVATIVE EFFICIENCY DISPLAY

The machine operator is continuously provided with information on the job status by means of an efficiency display. Possibilities to optimize the milling parameter settings are additionally displayed on the control panel.

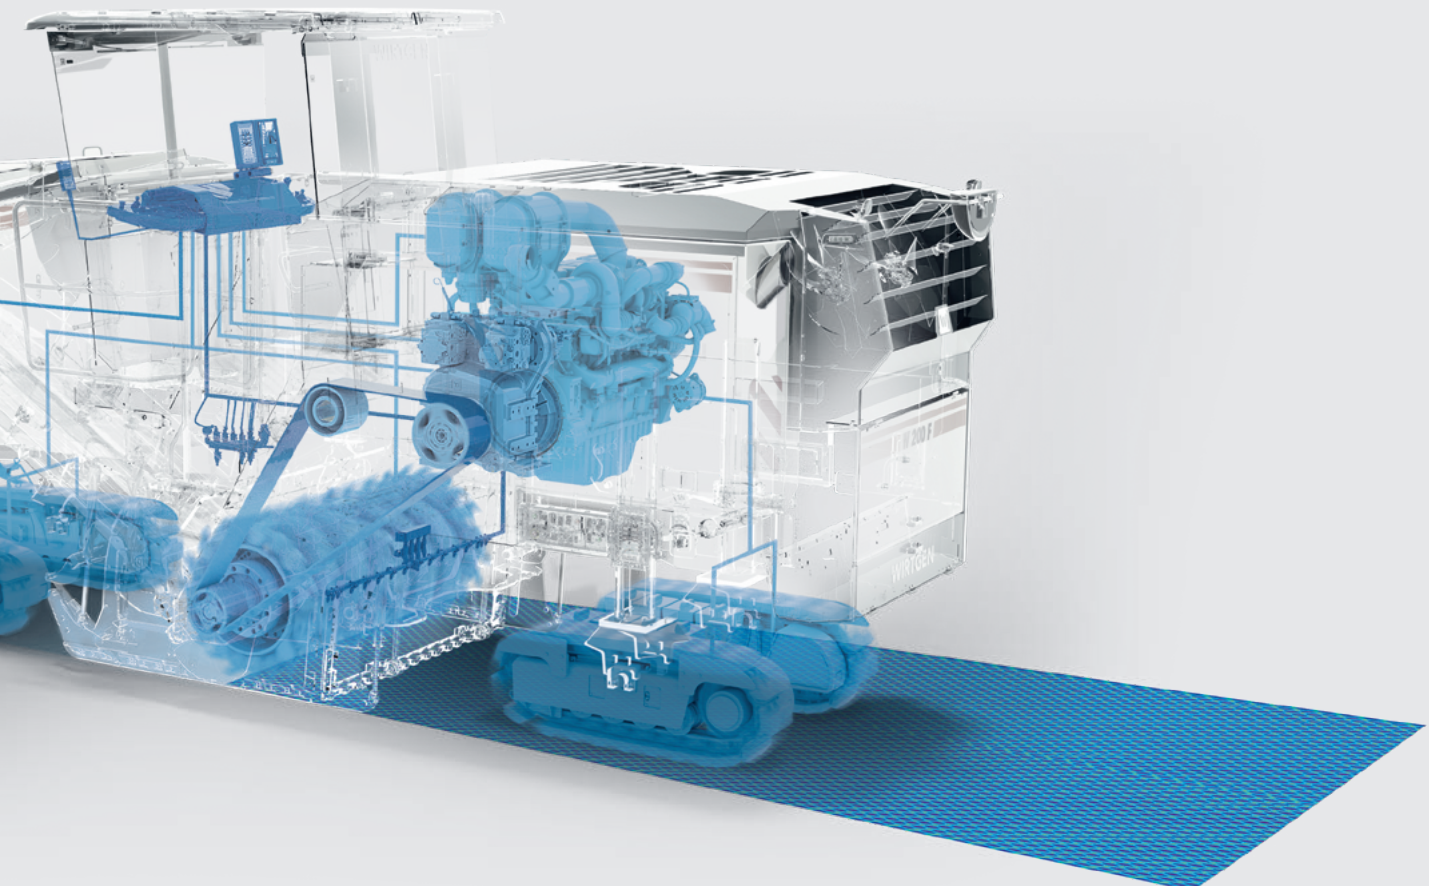

Performance

Maximum milling performance

22
23

HIGH-POWERED DIESEL ENGINE

Featuring low engine speeds at high torque, the high-powered diesel engine makes the W 200 F the ideal candidate for the whole range of milling jobs typically performed by a large milling machine.

INCREASED BALLASTING FLEXIBILITY

The additional weight of 1,600 kg can be mounted on or removed from the back of the machine quickly and easily in two steps. This feature permits the machine's transport weight to be precisely adjusted to requirements.



LARGE SCRAPER LIFT

The increased scraper lift permits increased milling depths, thus expanding the range of applications when milling without loading the milled material. At the same time, less material accumulates in the milling drum housing, which reduces wear and tear of the housing and milling drum. Different contact pressure stages of the scraper can additionally be adjusted quickly and conveniently in accordance with specific applications or requirements by simply pressing a button on the 7" control panel.



1 | Large slewing range of the discharge conveyor.

2 | Increased scraper lift for a wider range of milling applications and reduced wear.

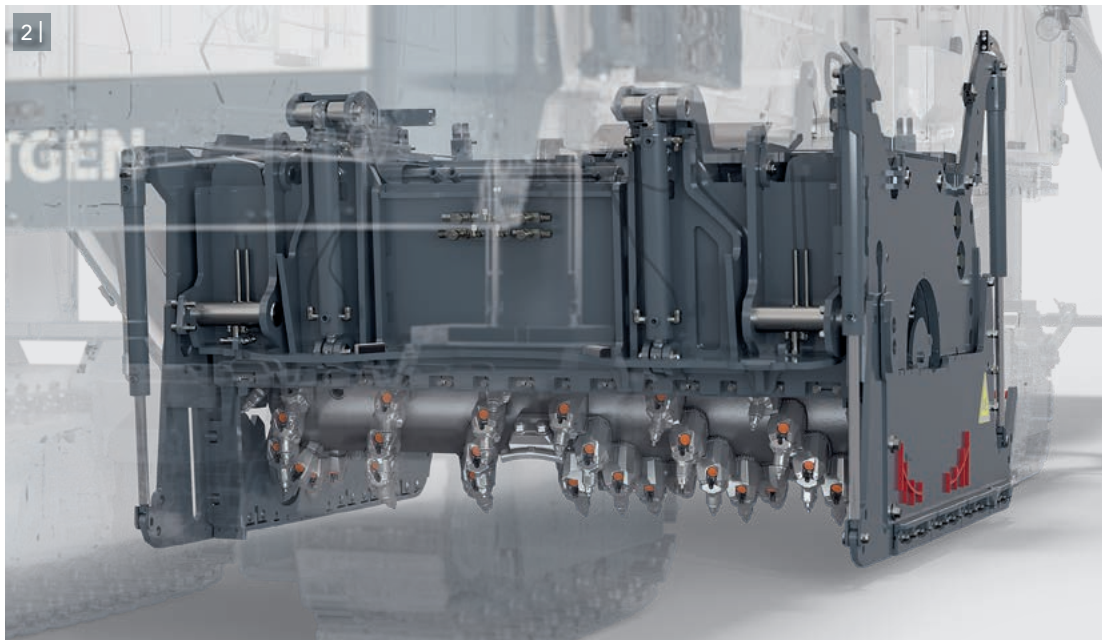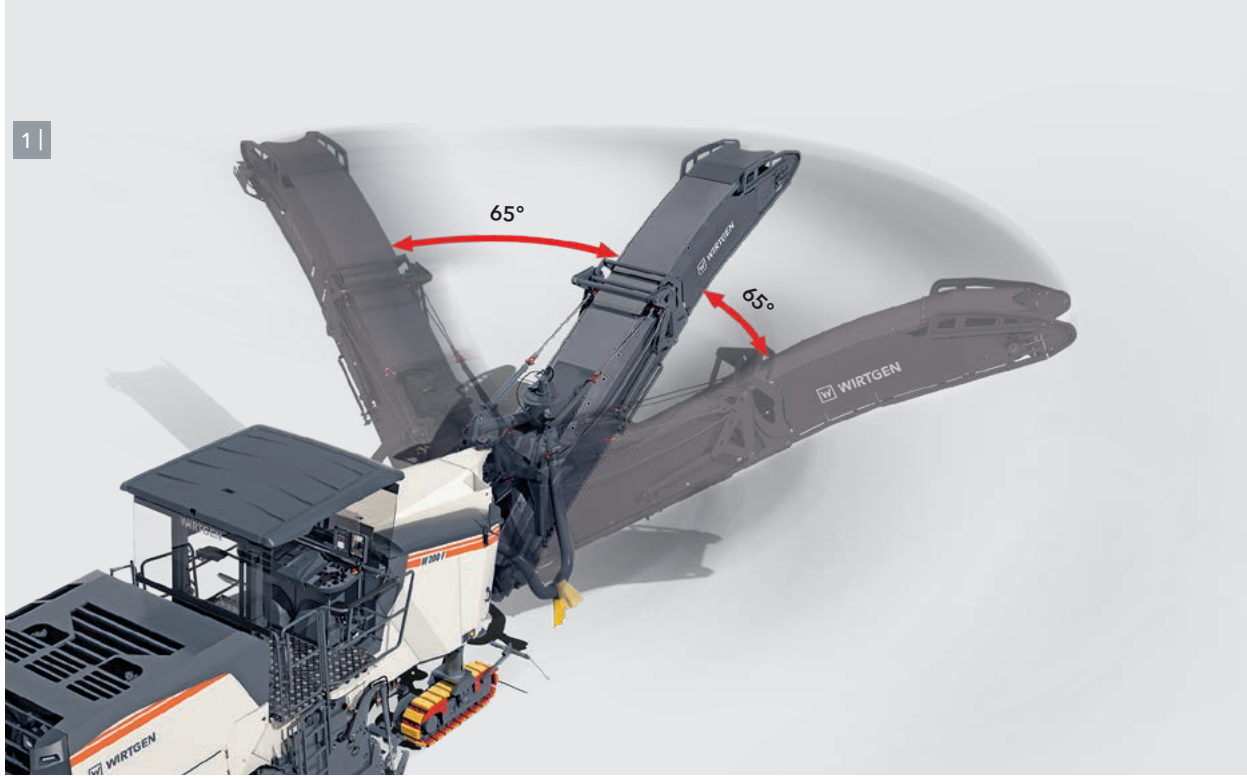

FLEXIBLE AND EFFICIENT MATERIAL LOADING

Tremendous conveyor slewing angles of 65° each to the left and right enable the milled material to be loaded even in difficult situations, for example, in road junctions or turning bays. The belt speed of the discharge conveyor can be adjusted at the simple push of a button to meet specific site and loading conditions. In addition, the hydraulically folding discharge conveyor is folded quickly for easy transport and quick adjustment to site conditions.

"BOOST" FEATURE TO INCREASE THE DISCHARGE TRAJECTORY

Pressing the "Boost" button on one of the two main control panels results in a temporary increase of the belt speed and conveying performance of the discharge conveyor by 20%, thus allowing the milled material to be discharged onto a truck bed at an exceptionally high or wide discharge trajectory.



Economy

Reduced diesel consumption


24
25

EXTENDED RANGE OF USABLE MILLING DRUM SPEEDS

State-of-the-art engine control enables the W 200 F to offer an exceptionally broad range of usable milling drum speeds. Especially the new, lower engine speed range permits significant diesel savings while at the same time offering tremendous milling performance.

MAXIMUM USE OF ENGINE POWER IN THE LOW ENGINE SPEED RANGE


The integrated **MILL ASSIST** machine control system prompts the diesel engine of the W 200 F to run mainly in the lower speed range while at the same time ensuring high performance and low diesel consumption.

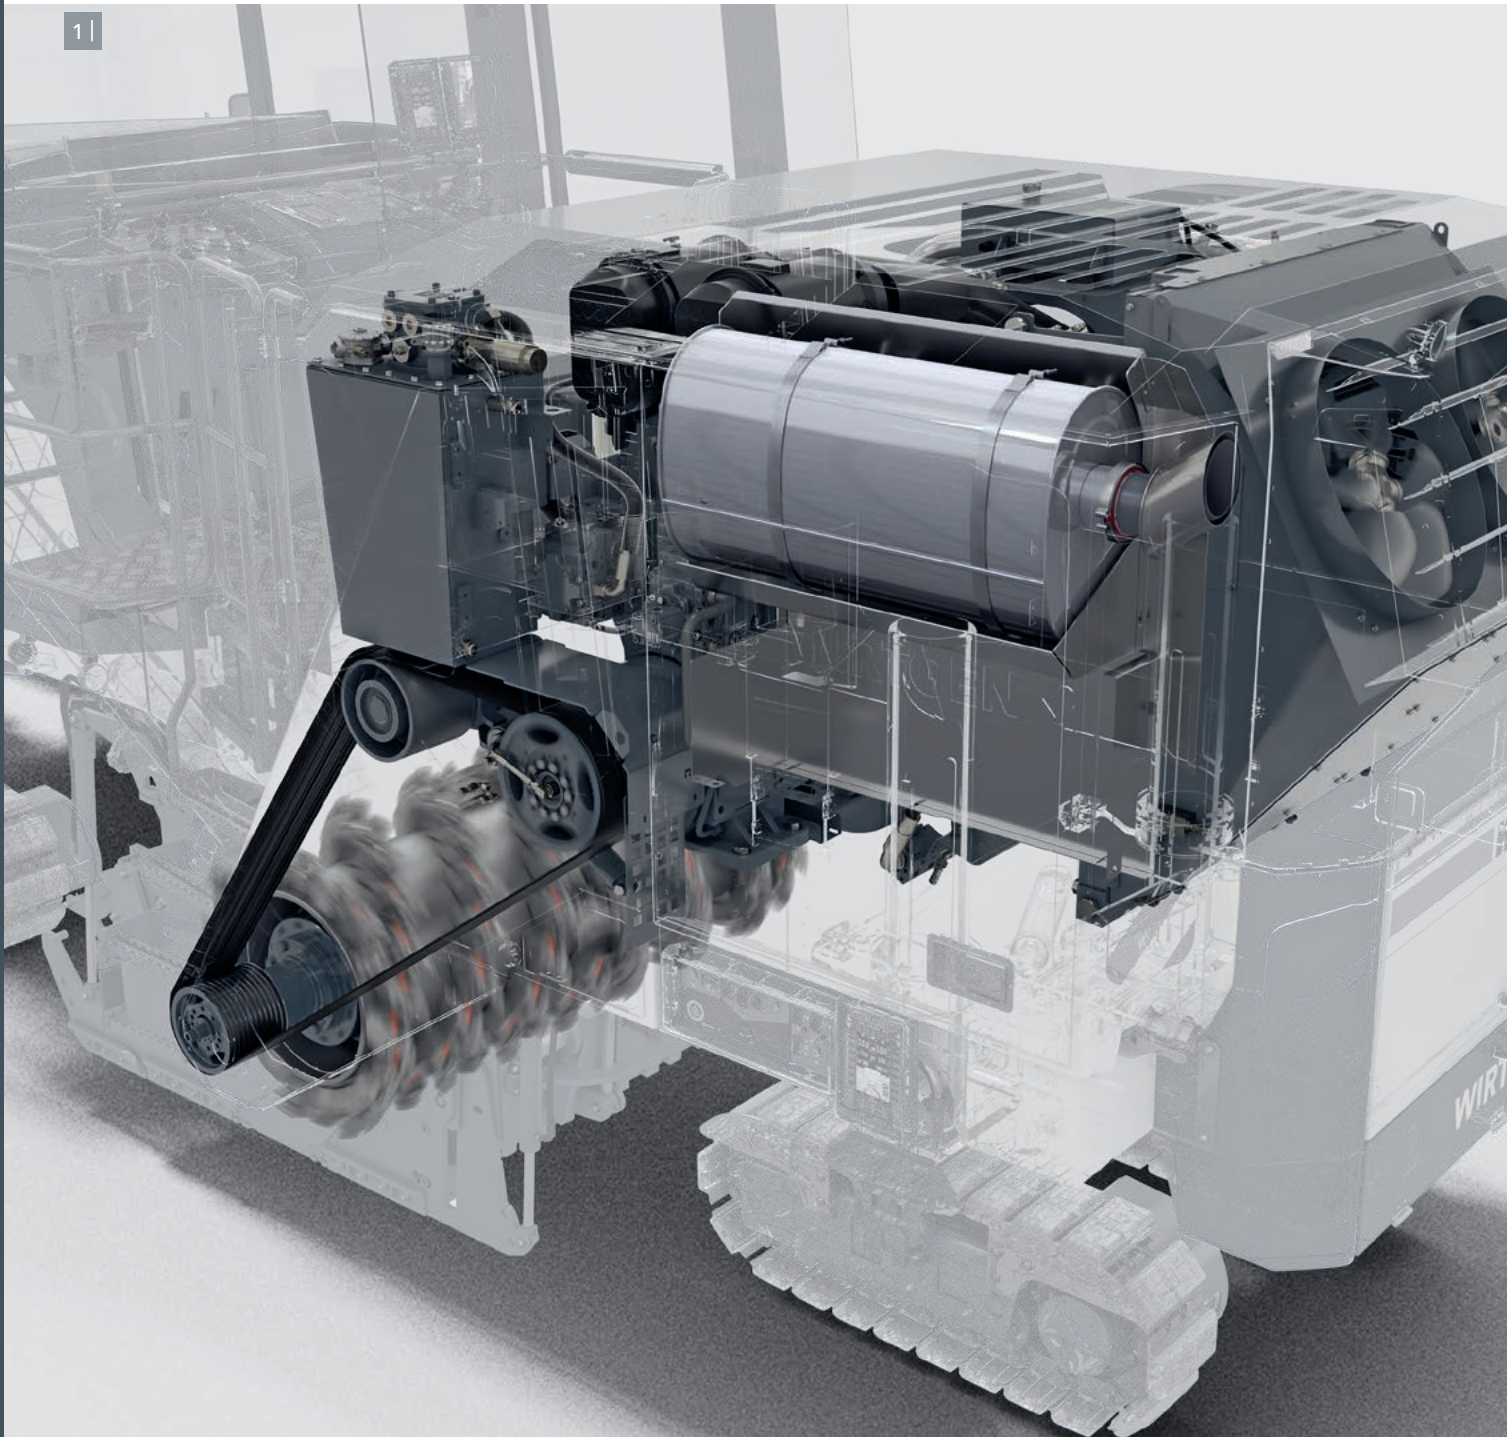

1 | Compact engine station.

2 | Extended range of milling drum speeds to reduce diesel consumption and pick wear.

2 | ENGINE CHARACTERISTICS OF COLD MILLING MACHINE W 200 F

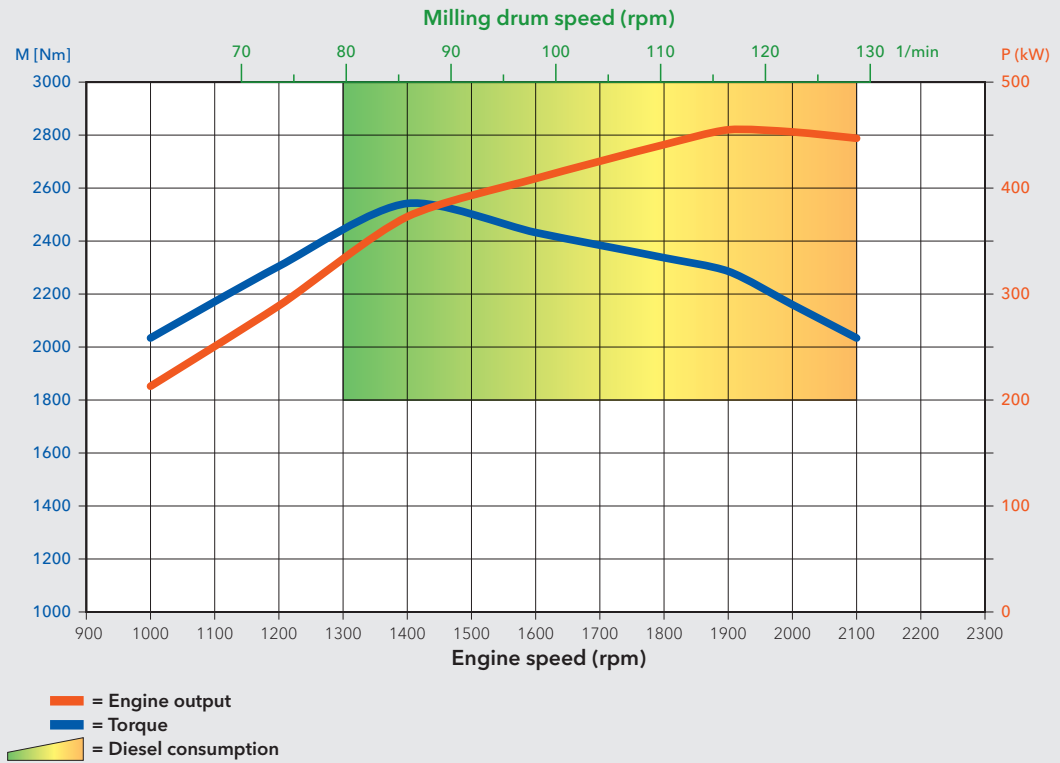

START-STOP ENGINE FEATURE VIA EXTERIOR CONTROL PANEL

The diesel engine can be easily switched on and off by the ground crew via the exterior control panel. This feature promotes lower diesel consumption and reduced noise emissions.

INTELLIGENT DUAL FAN CONCEPT

Two speed-controlled and intelligently arranged fans supply cooling power to the diesel engine and hydraulic system in accordance with requirements. In this way, the cooling system also makes an efficient contribution to reducing diesel consumption.



Economy

Environmentally sustainable machine technology

It is more important today than ever before to minimize exhaust, noise and dust emissions on road construction sites - while at the same time maintaining high levels of performance and productivity. Innovative WIRTGEN technologies make a significant contribution towards actively protecting both the environment and natural resources.

Consumption-optimized speed ranges during the milling operation, engine speeds adjusted in line with the machine's advance rate, and temperature-controlled fan speeds save resources and contribute to maintaining a clean environment. In addition, reclaimed asphalt pavement is a valuable recycling material that is fully reused in the production of asphalt mixes.


LOW EXHAUST EMISSIONS

The state-of-the-art, fuel-efficient diesel engine installed in the W 200 F offers maximum engine performance at an exceptionally high maximum torque. The engine technology complies with the requirements of exhaust emission standards EU Stage IIIa/US EPA Tier 3.

REDUCED NOISE EMISSIONS DURING REPOSITIONING

The cold milling machine offers a maximum travel speed of up to 100 m/min, which requires only low engine speeds - resulting in reduced diesel consumption and noise emissions.



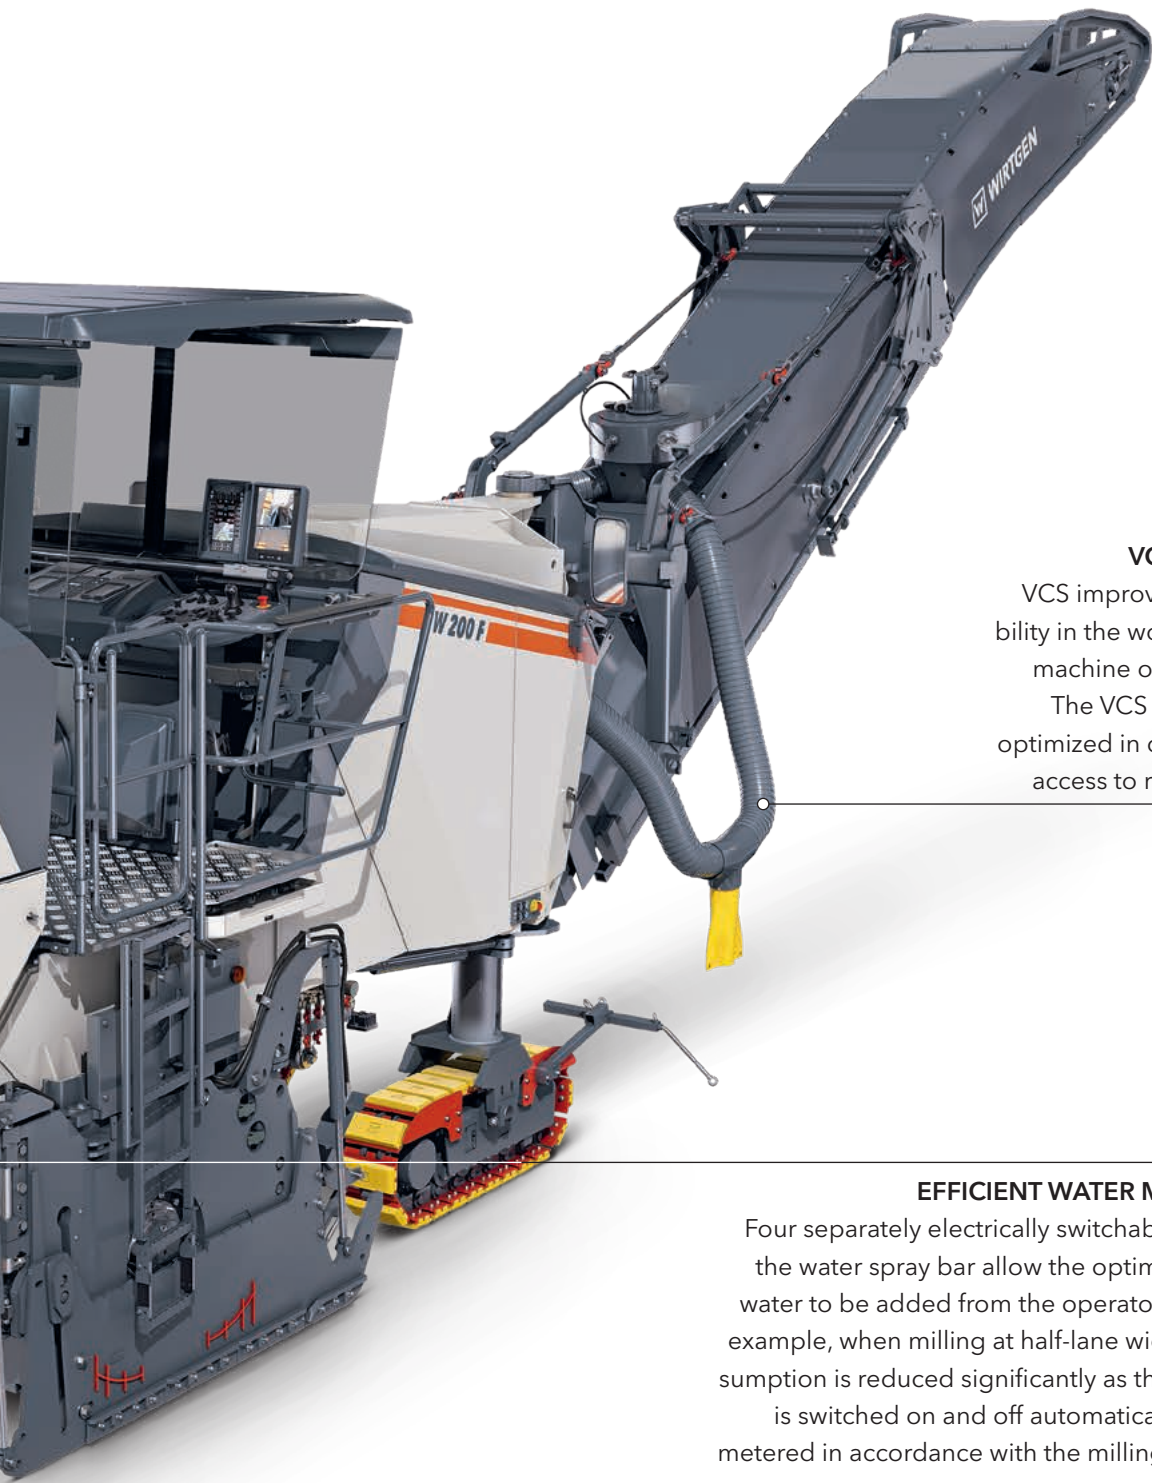

**OPTIMIZED
VCS EXTRACTION SYSTEM**

VCS improves the air quality and visibility in the working environment of the machine operator and ground crew.

The VCS suction channel has been optimized in design, offering improved access to reduce the cleaning effort.

EFFICIENT WATER MANAGEMENT

Four separately electrically switchable segments of the water spray bar allow the optimum quantity of water to be added from the operator's platform, for example, when milling at half-lane width. Water consumption is reduced significantly as the water system is switched on and off automatically and water is metered in accordance with the milling performance.

Technical specification

W 200 F

28
29

Milling drum	
Milling width, standard	2,000 mm
Milling width, optional	2,200 mm
Milling depth* ¹	0 to 330 mm
Drum diameter with tools	1,020 mm
Engine	
Manufacturer	CUMMINS
Type	QSX 15
Cooling	Water
Number of cylinders	6
Rated power at 2,100 rpm	447 kW/599 HP/608 PS
Maximum power at 1,900 rpm	455 kW/610 HP/619 PS
Displacement	15 l
Fuel consumption at rated power in field mix	99 l/h 40 l/h
Sound power level in accordance with DIN EN 500-2 Engine operator's platform	≤ 110 dB(A) ≥ 80 dB(A)
Exhaust emission standard	EU Stage IIIa/US EPA Tier 3
Electrical system	
Voltage supply	24 V
Filling capacities	
Fuel	1,200 l
Hydraulic oil	85 l
Water	3,270 l
Driving performance	
Max. travel and milling speed	0 to 100 m/min (6 km/h)
Track units	
Track units, front and rear (L x W x H)	1,565 x 260 x 600 mm
Loading of the milled material	
Belt width of primary conveyor	850 mm
Belt width of discharge conveyor	850 mm
Theoretical capacity of discharge conveyor	375 m ³ /h

*¹ = The maximum milling depth may deviate from the value indicated due to tolerances and wear.


Weight of basic machine	
Empty weight of machine excluding operating materials	25,500 kg
Operating weight, CE *2	27,750 kg
Maximum operating weight (full tanks, full range of equipment) in FB2200	34,250 kg
Weights of operating materials	
Water	3,270 kg
Fuel (0.83 kg/l)	1,000 kg
Additional add-on weights	
Operator and tools	
Operator	75 kg
5 pick containers	125 kg
On-board tools	30 kg
Optional milling drum units in lieu of standard	
Milling drum housing FB2200	170 kg
Quick-change milling drum unit FB2000 MCS BASIC	800 kg
Quick-change milling drum unit FB2200 MCS BASIC	1,050 kg
Optional milling drums in lieu of standard	
Milling drum FB2000 HT22 LA18 with 148 picks	-70 kg
Milling drum FB2200 HT22 LA15 with 175 picks	150 kg
Milling drum FB2200 HT22 LA18 with 159 picks	20 kg
Optional MCS milling drums in lieu of standard	
Milling drum MCS BASIC FB2000 HT22 LA15 with 162 picks	250 kg
Milling drum MCS BASIC FB2000 HT22 LA18 with 146 picks	225 kg
Milling drum MCS BASIC FB2200 HT22 LA15 with 176 picks	470 kg
Milling drum MCS BASIC FB2200 HT22 LA18 with 155 picks	340 kg
Optional additional equipment	
Operator's platform with simple stand-up seat and weather canopy	510 kg
Two-piece additional weight with a total weight of 1,600 kg	1,600 kg
Large storage compartment at the rear of the machine for 69 pick containers	150 kg
Extension of MCS BASIC with a hydraulically opening side door for FB2000 or FB2200	140 kg
VCS extraction system	140 kg
Extension of LEVEL PRO ACTIVE with levelling booms and one Sonic Ski	75 kg
Extension of LEVEL PRO ACTIVE with one hydraulic sensor mounted on the right	65 kg
Extension of LEVEL PRO ACTIVE with two hydraulic sensors mounted on the right and left	110 kg

*2 = Weight of machine, half weight of all operating materials, on-board tools, machine operator, no optional equipment features

Dimensions



W 200 F

30
31

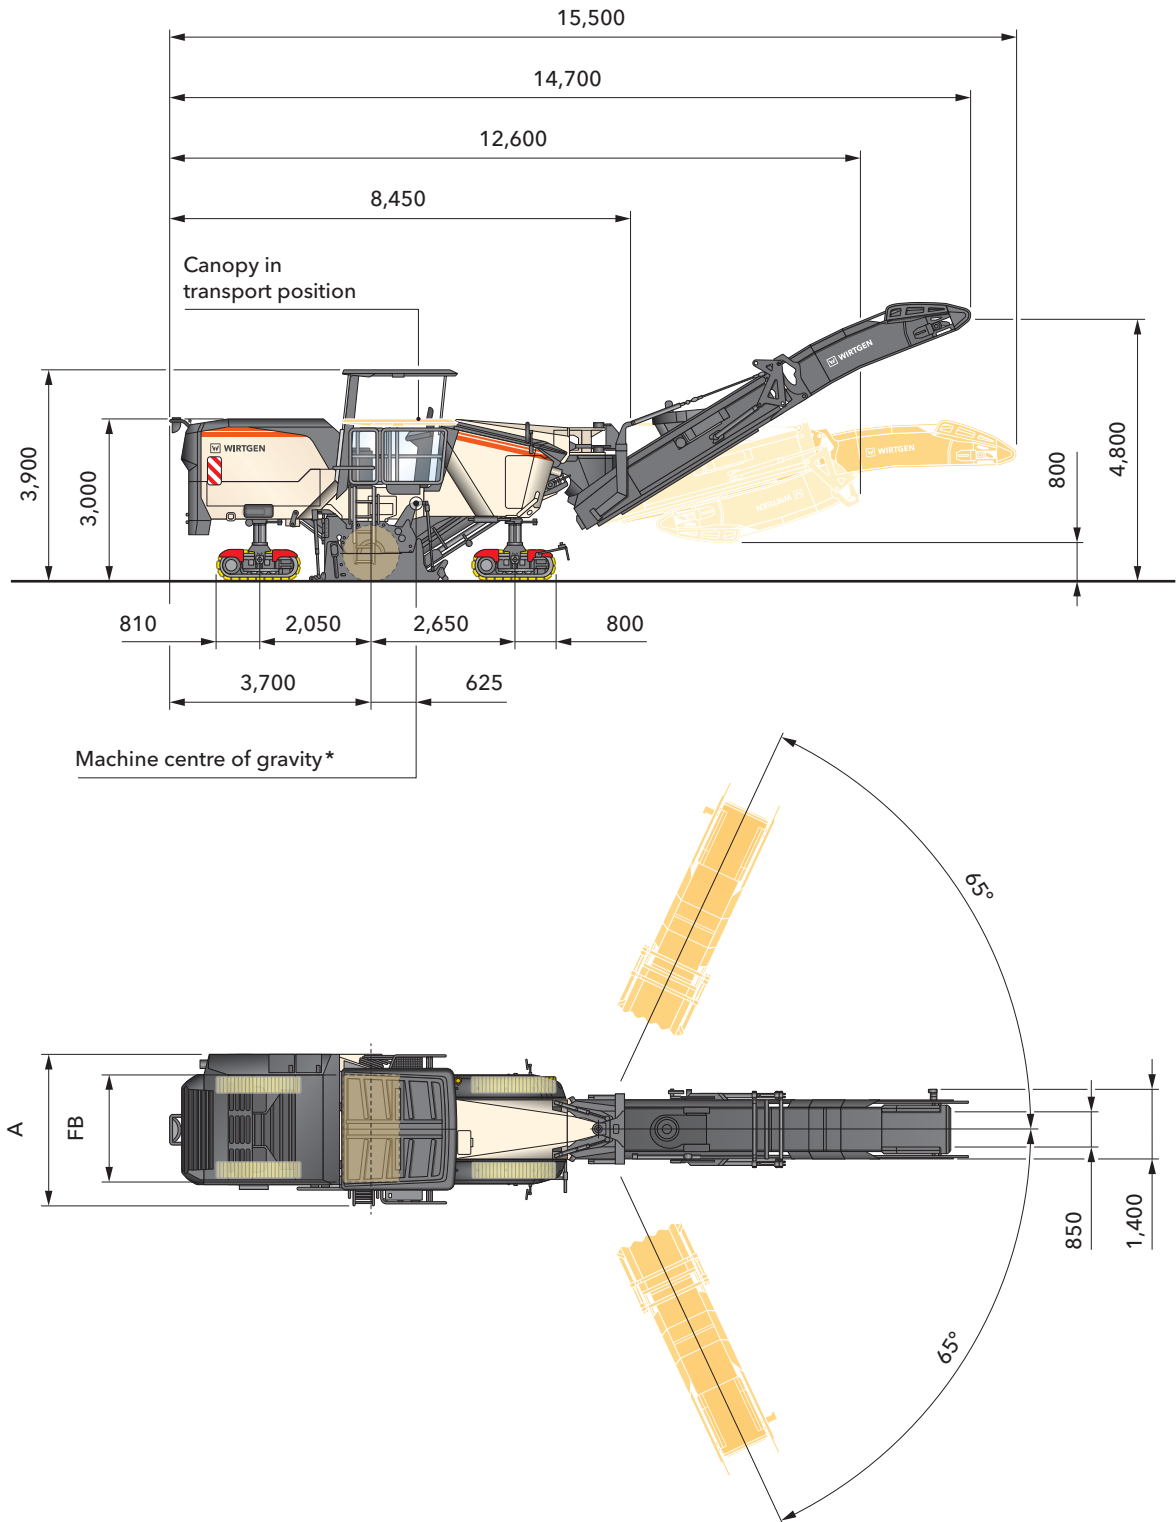

Dimensions in mm

*Based on operating weight, CE with conveyor folded out

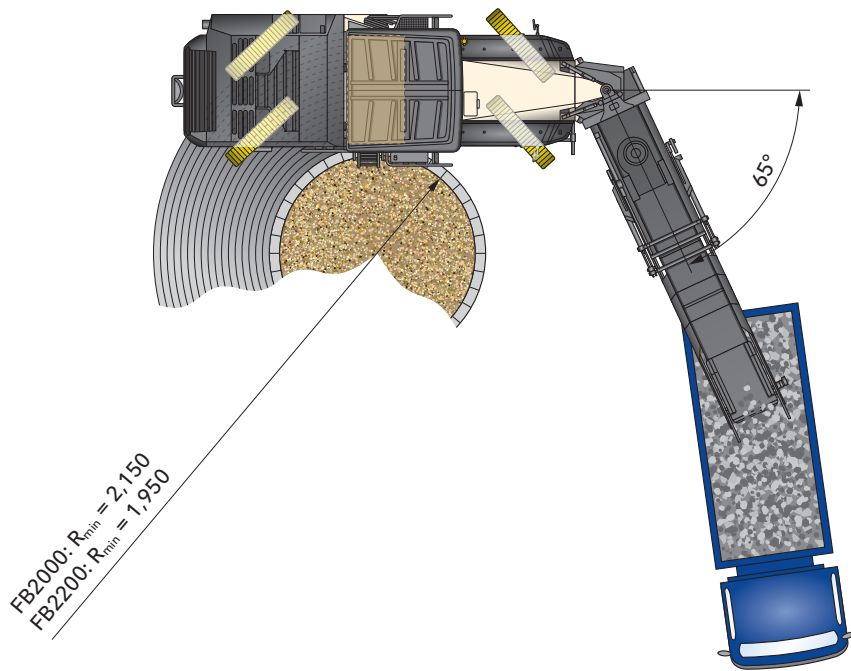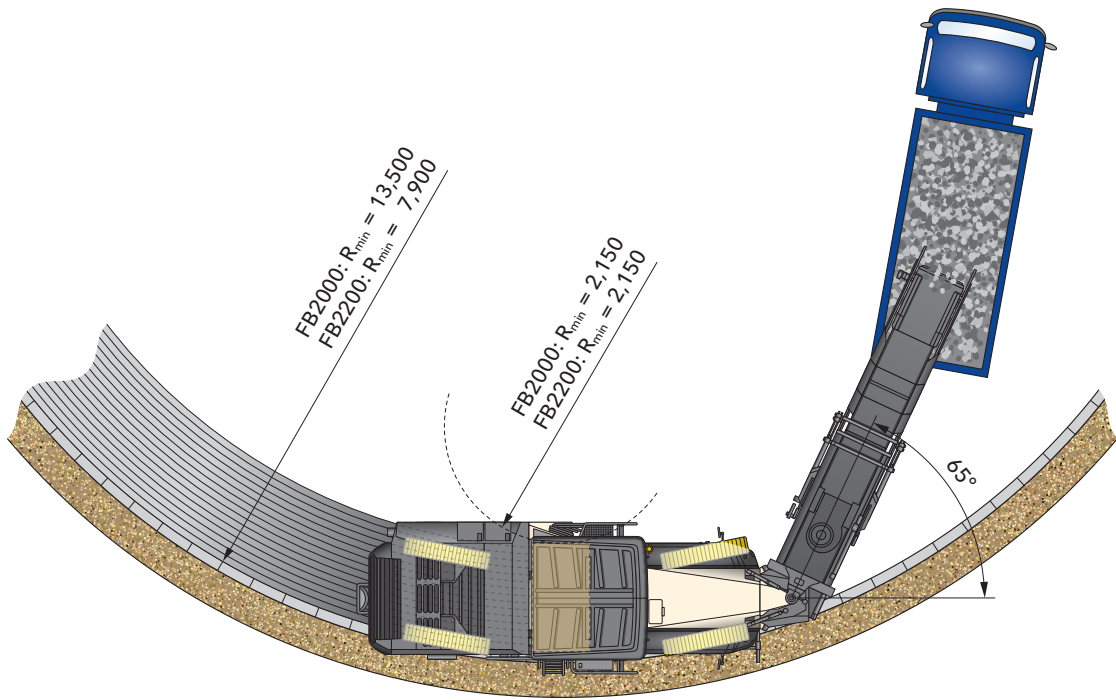

Milling radius, milling depth 150 mm, dimensions in mm

Standard equipment features

W 200 F

32
33

Basic machine	
Basic machine with engine	■
Machine frame featuring a single wasp waist at the rear right, and a dual wasp waist at the front	■
Hydraulically opening, soundproof engine cowling	■
Air compressor system	■
Two cooling fans to minimize power consumption of the cooling system	■
Milling drum unit	
Adjustment of material depressor contact pressure via the control panel or automatically via the MILL ASSIST feature to reduce chunk formation	■
Electrical adjustment of scraper contact pressure via the control panel	■
Automatically controlled locking feature of scraper	■
Single-piece water spray bar in the milling drum unit for reliable pick cooling and to prevent dust development	■
Automatic control of the water quantity via the MILL ASSIST feature	■
Height adjustment stroke increased by 150 mm to facilitate pick replacement and the exchange of milling drum units	■
Pre-fitting to allow the quick exchange of milling drum units	■
Hydraulically lifting side plates, clearance right 450 mm, clearance left 330 mm	■
Milling drum housing FB2000	□
Milling drums	
Milling drum FB2000 HT22 LA15 with 162 picks	□
Loading of the milled material	
Increased conveyor slewing angles of 65° each to the left and right	■
Discharge conveyor with adjustable conveying speed	■
Boost feature for a temporary increase of the belt speed and conveying performance of the discharge conveyor by 20%	■
Water spray system in the primary conveyor	■
Larger conveyor pump for a constant belt speed even at a low engine speed of 1,300 rpm	■
Discharge conveyor, 7,900 mm long, 850 mm wide	□
Machine control and levelling system	
User-friendly control panel including 7" colour screen	■
LEVEL PRO ACTIVE levelling system with numerous automated and complementary features relieving the operator of a part of his workload	■
LEVEL PRO ACTIVE - automatic height control in transport mode	■
LEVEL PRO ACTIVE - ramp milling and auto-start feature for the second milling cut	■
RAPID SLOPE cross-slope sensor for LEVEL PRO ACTIVE levelling system	■

- = Standard equipment
- = Standard equipment, replaceable with optional equipment
- = Optional equipment

Machine control and levelling system	
MILL ASSIST assistance system for automatic adjustment of the milling drum speed in accordance with the main area of application and the parameters selected in terms of engine load, advance rate, milling volume and quality of the milling pattern	■
Comprehensive machine diagnostics on the control panel including, for example, a diagnostic system for the CAN bus	■
Voltmeter integrated into the control panel for voltage measurement in the event of a malfunction	■
Two control panels for operating functions performed by ground crew	■
Operator's platform	
Convenient access to the operator's platform, right and left	■
Anti-vibration mounted operator's platform across the full width of the machine including additional fold-out extension, right	■
Electrical control cabinet on the operator's platform for optimum accessibility and fast troubleshooting	■
Two mirrors at the front, one mirror at the rear of the machine	■
Operator's platform with simple stand-up seats	□
Chassis and height adjustment	
PTS - automatic alignment of the machine parallel to the pavement surface	■
ISC - intelligent track speed control including hydraulic four-track drive	■
Fourfold full-floating axle for high machine stability	■
High travel speed of up to 100 m/min at low engine speeds (1,350 rpm), reduced diesel consumption and low noise emissions	■
Lifting speed of the height adjustment feature increased by 60%	■
Miscellaneous	
"Welcome" and "Go home" lights feature in the area of the operator's platform and access	■
Large storage compartment on the machine for pick containers	■
High-pressure water system with automatic on/off function, 18 bar, 67 l/min	■
Good accessibility to all maintenance points on the engine station	■
Pneumatic hammer with pick extractor/insertor	■
Comprehensive toolkit in lockable toolbox	■
A total of six EMERGENCY STOP switches in appropriate positions on the machine	■
Pre-fitting for installing the WITOS FleetView control unit	■
European design type certification, EuroTest mark and CE conformity	■
Water tank filling from rear of machine	□
Standard painting in RAL 9001 (cream)	□
WITOS FleetView - professional telematics solution to optimize machine use and servicing	□
Standard LED lighting system with 20,000 lumens	□
Electro-hydraulic unit	□

■ = Standard equipment

▣ = Standard equipment, replaceable with optional equipment

□ = Optional equipment

Optional equipment features

W 200 F

34
35

Milling drum unit	
Milling drum housing FB2200	<input type="checkbox"/>
Quick-change milling drum unit FB2000 MCS BASIC	<input type="checkbox"/>
Quick-change milling drum unit FB2200 MCS BASIC	<input type="checkbox"/>
Extension of MCS BASIC with a hydraulically opening side door for FB2000	<input type="checkbox"/>
Extension of MCS BASIC with a hydraulically opening side door for FB2200	<input type="checkbox"/>
Quick-change milling drum unit FB2000 MCS and milling drum MCS BASIC FB2000 LA15	<input type="checkbox"/>
Quick-change milling drum unit FB2200 MCS and milling drum MCS BASIC FB2200 LA15	<input type="checkbox"/>
Milling drums	
Milling drum FB2000 HT22 LA18 with 148 picks	<input type="checkbox"/>
Milling drum MCS BASIC FB2000 HT22 LA15 with 162 picks	<input type="checkbox"/>
Milling drum MCS BASIC FB2000 HT22 LA18 with 146 picks	<input type="checkbox"/>
Milling drum FB2200 HT22 LA15 with 175 picks	<input type="checkbox"/>
Milling drum FB2200 HT22 LA18 with 159 picks	<input type="checkbox"/>
Milling drum MCS BASIC FB2200 HT22 LA15 with 176 picks	<input type="checkbox"/>
Milling drum MCS BASIC FB2200 HT22 LA18 with 155 picks	<input type="checkbox"/>
Milling drum FB2000 HT22 LA8 with 274 picks	<input type="checkbox"/>
Milling drum FB2000 HT22 LA25 with 124 picks	<input type="checkbox"/>
Milling drum FB2000 HT5 LA6X2 with 672 picks	<input type="checkbox"/>
Milling drum FB2200 HT22 LA8 with 298 picks	<input type="checkbox"/>
Milling drum FB2200 HT22 LA25 with 134 picks	<input type="checkbox"/>
Milling drum FB2200 HT5 LA6X2 with 740 picks	<input type="checkbox"/>
Milling drum MCS BASIC FB2000 HT22 LA8 with 272 picks	<input type="checkbox"/>
Milling drum MCS BASIC FB2000 HT22 LA25 with 126 picks	<input type="checkbox"/>
Milling drum MCS BASIC FB2000 HT5 LA6X2 with 672 picks	<input type="checkbox"/>
Milling drum MCS BASIC FB2000 HT22 LA15 with 18 standard picks and 144 PCD tools	<input type="checkbox"/>
Milling drum MCS BASIC FB2200 HT22 LA8 with 297 picks	<input type="checkbox"/>
Milling drum MCS BASIC FB2200 HT22 LA25 with 121 picks	<input type="checkbox"/>
Milling drum MCS BASIC FB2200 HT5 LA6X2 with 740 picks	<input type="checkbox"/>
Milling drum MCS BASIC FB2200 HT22 LA15 with 18 standard picks and 158 PCD tools	<input type="checkbox"/>
Loading of the milled material	
Discharge conveyor, 7,900 mm long, 850 mm wide, with hydraulic folding device	<input type="checkbox"/>
VCS extraction system	<input type="checkbox"/>
Support device for discharge conveyor	<input type="checkbox"/>

- = Standard equipment
- = Standard equipment, replaceable with optional equipment
- = Optional equipment

Machine control and levelling system	
Actual milling depth measurement and display on the LEVEL PRO ACTIVE panel	<input type="checkbox"/>
Overload sensors installed on the scraper	<input type="checkbox"/>
Active floating position for the side plates, left and right	<input type="checkbox"/>
5" control panel for controlling the levelling system	<input type="checkbox"/>
7" control panel for displaying the machine control system and for controlling the levelling system	<input type="checkbox"/>
Extension of LEVEL PRO ACTIVE with levelling booms and one Sonic Ski	<input type="checkbox"/>
Extension of LEVEL PRO ACTIVE with one hydraulic sensor mounted on the right	<input type="checkbox"/>
Extension of LEVEL PRO ACTIVE with two hydraulic sensors mounted on the right and left	<input type="checkbox"/>
Extension of LEVEL PRO ACTIVE with two ultrasonic sensors for multiplex scanning	<input type="checkbox"/>
Extension of LEVEL PRO ACTIVE with four ultrasonic sensors for multiplex scanning	<input type="checkbox"/>
Extension of LEVEL PRO ACTIVE with pre-fitting for 3D laser levelling for machines without canopy	<input type="checkbox"/>
Extension of LEVEL PRO ACTIVE with pre-fitting for 3D laser levelling for machines with canopy	<input type="checkbox"/>
Extension of LEVEL PRO ACTIVE with two laser receivers	<input type="checkbox"/>
Operator's platform	
Operator's platform with simple stand-up seat and a large storage compartment	<input type="checkbox"/>
Operator's platform with simple stand-up seat and weather canopy	<input type="checkbox"/>
Miscellaneous	
Hydraulically operated filling pump for water refilling	<input type="checkbox"/>
Painting in one special colour (RAL)	<input type="checkbox"/>
Painting in two special colours (RAL)	<input type="checkbox"/>
Painting in maximum two special colours with the lower part of the machine painted in special colour (RAL)	<input type="checkbox"/>
Extended LED lighting system with 37,500 lumens	<input type="checkbox"/>
Extended electro-hydraulic unit	<input type="checkbox"/>
Two-piece additional weight with a total weight of 1,600 kg	<input type="checkbox"/>
Large storage compartment at the rear of the machine for 69 pick containers	<input type="checkbox"/>
Storage compartment close to the rear crawler units for 8 pick containers	<input type="checkbox"/>
Milling drum rotation device	<input type="checkbox"/>
Electrically switchable sectional water spray bar for FB2000	<input type="checkbox"/>
Electrically switchable sectional water spray bar for FB2200	<input type="checkbox"/>
Side plates including wear protection rollers	<input type="checkbox"/>
Milling drum mounting and transport carriage FB1500 to FB2500	<input type="checkbox"/>
Powerful high-pressure water cleaner, 150 bar, 15 l/min	<input type="checkbox"/>
Hydraulic pick extractor	<input type="checkbox"/>
2-fold camera system	<input type="checkbox"/>
4-fold camera system with 10" control panel	<input type="checkbox"/>
8-fold camera system with 10" control panel	<input type="checkbox"/>
Licence plate holder with LED lighting	<input type="checkbox"/>

■ = Standard equipment

■ = Standard equipment, replaceable with optional equipment

□ = Optional equipment



WIRTGEN GmbH

Reinhard-Wirtgen-Str. 2 · 53578 Windhagen · Germany

Phone: +49 (0)26 45/131-0 · Fax: +49 (0)26 45/131-392

Internet: www.wirtgen.com · E-Mail: info@wirtgen.com

